
FloPlast building the future

Product Brochure

April 2020





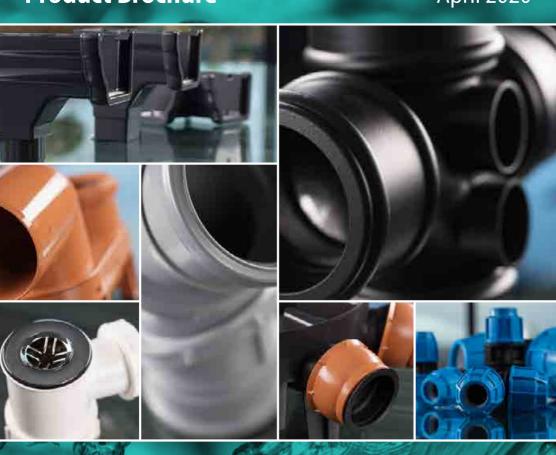









FloPlast



FloPlast are an established market leader in the manufacture and supply of plastic building and plumbing systems in the UK.

The company's specialist areas are PVC-UE Roofline, Window & Cladding, Rainwater, Soil & Waste, Underground Drainage, MDPE systems and Hot & Cold Plumbing systems.

FloPlast place a heavy emphasis on product design with many innovative features to its products making them practical both to install and in their functionality.

The company has invested heavily in its infrastructure to ensure that its products are manufactured and supplied to its customers on a cost effective basis.

With competitive pricing and an extensive range of high quality products, **FIOPlast** endeavour to provide an excellent service to both stockist and end user alike.



CONTENTS

Roofline, Window and Cladding Systems	Page
Introduction	4
Fascia, soffit, window boards and fittings	5
Roofline trims	7
Window system trims	8
Cladding systems	8
Woodgrain fascia, soffit and window boards	9
Woodgrain roofline trims	10
Woodgrain window trims	10
Woodgrain cladding systems and fittings	11

Rainwater Systems	Page
Introduction	12
Leaf/Weather protection and ancillaries	13
Half Round 112mm gutter	14
68mm Round downpipe	15
Square Line 114mm gutter	16
65mm Square downpipe	17
Niagara Ogee 110mm gutter	18
Hi-Cap 115mm gutter	19
80mm round downpipe	20
Spare gutter clips and seals	20
MiniFlo 76mm gutter & 50mm downpipe	21
XtraFlo 170mm gutter & 110mm round downpipe	22

Anthracite Grey Rainwater Systems	Page
Half Round 112mm gutter	23
Square Line 114mm gutter	23
Hi-Cap 115mm gutter and 68mm downpipe	24
Niagara ogee 110mm gutter	24
68mm Round downpipe	25
65mm Square downpipe	25

"Cast Iron" Style Rainwater Systems	Page
Half Round 112mm gutter	26
Hi-Cap 115mm gutter	26
68mm Round downpipe & spares	27
Spares	27
Niagara Ogee 110mm gutter	28
65mm Square downpipe & spares	28
Hoppers, motifs for hoppers and fittings	29

Rainwater Harvesting	Page
StormSaver rainwater harvesting system	30
EcoFlo water butts & rainwater diverters	31

Soil & Waste Systems	Page
Introduction	32
Air admittance valves	33
110mm Soil-WC pan connectors	33
110mm Ring seal soil	34
110mm "Cast Iron" style ring seal soil	36
110mm Solvent soil	37

Anthracite Grey Soil & Waste Systems	Page
NEW 110mm Ring seal soil	38
NEW 32/40mm ABS Solvent weld waste	39

Soil & Waste Systems	Page
32/40/50mm ABS Solvent weld waste	40
32/40/50mm Polypropylene push-fit waste	41
FlexiFlo connectors	41
Waste traps	42
32/40mm Unicom compression waste	44
32/40mm Chrome unicom compression waste	44
21.5mm Overflow Waste	45
Ancillaries	45

Underground Drainage Systems	Page
Introduction	46
110mm Underground drainage	47
160mm Underground drainage	51
FloDrain channel drainage	52
Ground Guard	53
Land drainage	53

MDPE Systems	Page
MDPE Pipe	54
MDPE Compression fittings	55





Introduction to PVC-UE Roofline, Window & Cladding Systems

FloPlast Roofline, Window & Cladding extrusions are manufactured on state of the art machinery and extrusion die's at the group's Cork plant, which has over 40 years extrusion experience.

FloPlast boards offer a complete maintenance free solution to both Roofline and Window Systems construction. The tough impermeable outer skin of **FloPlast** foam boards provides year round protection from both weather and insect infestation.

A range of these products are also available with a laminated woodgrain finish.

The system comes with a 20 year white and a 10 year woodgrain performance and Colour Guarantee.





White Roofline and Cladding Systems have been assessed and achieved British Board of Agrément Certification as follows:-







Scan with your smart phone for more information.

FloPlast boards offer a low maintenance solution to both Roofline and Window Systems construction. The tough impermeable outer skin of FloPlast co-extruded foam boards provides year round protection from both the weather and insect infestation.

Other features include:-

■ Maintenance

Will not rot, warp, crack or erode. They do not require painting or any other protective treatment.

■ Weather resistance

The impermeable outer skin and closed-cell composition of the boards are unaffected by moisture and will not rot or corrode.

■ Durability

The combined cellular core and co-extruded PVC-U surface skin ensure high durability in all conditions.

■ Thermal efficiency

Good insulating properties, improves overall thermal insulation of composite wall construction.

■ Compatibility

No chemical reaction with other common building materials.

■ Workable

Cutting, drilling, nailing and shaping are easily achieved.

Finish

High gloss finish with blemish free surface.



White PVC-UE Roofline Board

window board or reveal liner.

Product	Size	Code
Universal Board - 9mm		
Suitable as fascia (refurbishment - install over timber support),		

Single Leg:	100mm	U100
	150mm	U150
	175mm	U175
	200mm	U200
	225mm	U225
	250mm	U250
	275mm	U275
	300mm	U300
Double Leg:	354mm	U350
	450mm	U450

Square Edge Universal Board - 9mm

Suitable as fascia (refurbishment - install over timber support), window board or reveal liner.

Single Leg:	150mm	L150
	175mm	L175
	200mm	L200
	225mm	L225
	250mm	L250
Double Leg:	400mm	L400

Ogee Fascia Board - 10mm

Suitable as fascia (refurbishment - install over timber support).

Sartable as lasela (relatibistitient litistan over timber support).		
Single Leg:	150mm	O150
	175mm	O175
	200mm	O200
	225mm	O225
	250mm	O250
Double Leg:	404mm	O404

Product	Size	Code
Box End Boards		
Universal Board	454mm	UB454
Mammoth Board	404mm	MB404
Ogee Mammoth Board	454mm	GB454

Product	Size	Code
Mammath Daard 10mm		

Suitable as fascia (replacement/new build install direct to rafters), window board or reveal liner.

Single Leg:	150mm	M150
	175mm	M175
	200mm	M200
	225mm	M225
	250mm	M250
	300mm	M300
Double Leg:	404mm	M404

Ogee Mammoth Board - 18mm

Suitable as fascia (replacement/new build, install direct to rafters).

Single Leg:	150mm	G150
	175mm	G175
	200mm	G200
	225mm	G225
	250mm	G250
	300mm	G300
Double Leg:	454mm	G454



All boards and trims are manufactured in 5 metre lengths unless otherwise stated.



White PVC-UE Roofline Soffit

Product	Size	Code
Multi-Purpose Soffit Board - 10mm		
Single Round Edge:	100mm	S100
	150mm	S150
	175mm	S175
	200mm	S200
	225mm	S225
	250mm	S250
	500mm	S500
Double Round Edge:	304mm	S304
j	404mm	S404
	600mm	S600
Hollow Soffit To be used as a soffit only.		
	300mm	H300
Hollow Soffit Trims		
	'J'	НЛ
	'H'	НН

Product	Size	Code
Vented Soffit - 10mm		
	100mm	V100
Also Comments	150mm	V150
3399	175mm	V175
2122	200mm	V200
	225mm	V225
	250mm	V250
	304mm	V304
	404mm	V404
	500mm	V500
	600mm	V600
Double Vented Soffit - 1	0mm	
Acres	175mm	DV175
	200mm	DV200
	250mm	DV250
	304mm	DV304
	404mm	DV404
Vented soffit with a double row of ven	s is available for special order.	

White Fixings A4 Stainless Steel Pins/Nails with white plastic heads

Product	Size	Code
FloTop Pins (6		
	30mm	FP30
	40mm	FP40
FloTop Nails		
	50mm	FN50
	65mm	FN65
Clad Pins (€		
	30mm	CP30
	50mm	CP50





Product	Size	Code
In-Line Joints		
	300x42mm Leg	RT1
	500x35mm Leg	RT2*
	500x42mm Leg	RT3#
*Double ended joint - cut to 2 size *Double ended joint - cut to 2 size	es as required. To be used with Mamn s as required. To be used with Univer	noth Board. sal Board.
Corner Joints		
	300x42mm Leg	RT4
-3	500x35mm Leg	RT5*
	500x42mm Leg	RT6#
	300x42mm Leg Internal Corner	RT7
	300x42mm Leg External Corner 135	RT10
*Double ended joint - cut to 2 siz *Double ended joint - cut to 2 size	es as required. To be used with Man es as required. To be used with Univ	nmoth Board. ersal Board.
Square In-Line Joints		
	300x42mm Leg	RT16
Square Corner joints		
	300x42mm Leg	RT13
	300x42mm Leg Internal Corner	RT18
Ogee In-Line Joints		
	300x50mm	RT11
	500x50mm	RT12*
*Double ended ogee joint - cut to	2 sizes as required.	
Ogee Corner Joints		
	300x50x50mm	RT14
	500x50x50mm	RT15*
-	300x42mm leg Ogee Internal Corner	RT17

*Double ended ogee joint - cut to 2 sizes as required.

Product	Size	Code
Ogee Box End Cover		
	404x60mm	RT19
Bargeboard Moulding Tri	m	
7	500mm	RT22
Finials		
	340mm	RT23
	900mm	RT29
Disc Soffit Ventilator		
9	75mm Diameter	RT25

Product	Code	
In-Line Jointing Trim		
	RT20	
Edge Capping Trims		
	RT21	
Soffit Ventilator		
A. C.	RT24	
Soffit Ventilator with Mesh		
	RT27	

Product	Size	Code
Over Fascia Ventilation 0.5 metre		
	10mm	OFV10
Eaves protection system 1.5 metre		
		EPS

All boards and trims are manufactured in 5 metre lengths unless otherwise stated.



White Window Systems

Product	Size	Code
Architrave-Pencil Round		
	45x6mm	WT1
	65x6mm	WT2
	95x6mm	WT3
D Section		
	28x6mm	WT4
Edge Fillet		
	20mm	WT5
Quadrant		
	12mm	WT6
	19mm	WT7
Square		
	15x13mm	WT8

Product	Size	Code
Board End Mouldings	Size	Couc
	42x50mm (pair)	WT14
A STATE OF THE PARTY OF THE PAR	42x315mm (1 ltem)	WT15
Window Board Channel		
	10x5mm	RT21
Angle		
	100x80mm 90° Hollow	WT30
	25x25mm 90° Rigid	WT31
	50x50mm 90° Rigid	WT32
	25x25mm Flexi	WT36
	35x35mm Flexi	WT37
	75x75mm Flexi	WT38

White Cladding Systems BS EN 13245-2 Attestation Level 4

Willie Clauding Systems 85 EN 13245-	-2 Attestation Leve
Product	Code
100mm V Joint Cladding	
-11	C100
150mm Shiplap Cladding	
	C150
Top Edge Trim (two part)	
	CT1
Starter Trim	
	CT2
Universal Channel	

4	(€
Product	Code
Drip Trim	
	CT4
Internal/External Corner (two part)	
1	CT5
Centre Joint Trim	
	СТ7
150mm Butt Joint Trim	
	СТ8

All boards and trims are manufactured in 5 metre lengths unless otherwise stated.

CT3











Woodgrain PVC-UE Roofline Board

Product	Foil	Size	Code
Universal Board - 9mm			

Suitable as fascia (refurbishment - install over timber support), window board or reveal liner.


Single Leg	WG WB WR WA	150mm	U150
	WG WB WR WA	175mm	U175
	WG WB WR WA	200mm	U200
	WG WB WR WA	225mm	U225
	WG WB WR WA	250mm	U250
-	WG WB WR	300mm	U300
Double Leg	WG WB WR WA	454mm	U454

Mammoth Board - 18mm

Suitable as fascia (replacement/new build install direct to rafters), window board or reveal liner.




Multi-Purpose Board - 10mm



Woodgrain PVC-UE Roofline Soffit

Product	FOIL	Size	Code
Vented Soffit - 10n	nm		
	WG WB WR WA	150mm	V150
	WG WB WR WA	175mm	V175
	WG WB WR WA	200mm	V200
	WG WB WR WA	225mm	V225
	WG WB WR	250mm	V250
	WG WB WR WA	304mm	V304
	WG WB WR WA	404mm	V404
Double Vented Soffit - 10mm			



Vented soffit with a double row of vents is available to special order.

Hollow Soffit

To be used as a soffit only.

1111111	MG MR MK WA	300mm	H300
Hollow Soffit Trims			
	WG WB WR WA	'J'	HJ
DESCRIPTION OF THE PERSON OF T	WG WB WR WA	'H'	НН

Product	Foil	Size	Code
Box End Boards			
Universal Board	WG WB WR WA	454mm	UB454
Mammoth Board	WG WB WR WA	404mm	MB404











Woodgrain Roofline Trims and Joints

Product	Foil	Size	Code
In-Line Joints			
-	WG WB WR WA	300x42mm	RT1
A Company of the Comp	WG WB WR WA	500x35mm	RT2#
*Double ended joint - cut to 2 sizes as required. To be used with Mammoth Board.			
Corner Joints			

Product	Foil	Size	Code
Internal Corner			
	WG WB WR WA	300x42mm	RT7
Finial			
	WG WB WR WA	340mm	RT23

Corner Joints			
A STATE OF THE PARTY OF THE PAR	WG WB WR WA	300x42mm	RT4
1	WG WB WR WA	500x35mm	RT5#
Double ended joint - cut to	2 sizes as required. To be	used with Mam	moth Board.

Product	Foil	Price*
In-Line Jointing Trim		
	WG WB WR WA	RT20

Woodgrain Window Systems

Woodgram Williaow Systems			
Product	Foil	Size	Code
Architrave-Pencil F	Round		
	WG WB WR WA	45x6mm	WT1
The same of the sa	WG WB WR WA	65x6mm	WT2
	WG WB WR WA	95x6mm	WT3
D Section			
	WG WB WR WA	28x6mm	WT4
Edge Fillet			
	WG WB WR	20mm	WT5
Quadrant			
	WG WB WR	12mm	WT6
No. of Contract of	WG WB WR WA	19mm	WT7
Square			
1	WG WB WR	15x13mm	WT8

Product	Foil	Size	Code
Board End Mouldin	igs		
	WG WB WR	42x50mm	WT14
	WG WB WR	42x315mm	WT15
Angle			
	WG WB WR	100x80mm 90° Hollow	WT30
	WG WB WR	25x25mm 90° Rigid	WT31
	WG WB WR	50x50mm 90° Rigid	WT32
·	·		

All boards and trims are manufactured in 5 metre lengths unless otherwise stated. When ordering please add foil reference to code, e.g. WT15 WG











Woodgrain Cladding Systems BS EN 13245-2 Attestation Level

Product	Foil	Code
100mm V Joint Cladding		
	WG WB WR	C100
150mm Shiplap Cladding		
	WG WB WR WA	C150
Top Edge Trim (two part)		
	WG WB WR WA	CT1
Starter trim		
1	WG WB WR WA	CT2
Universal Channel:		
	WG WB WR WA	CT3

ation Level 4			
Product	Foil	Code	
Drip Trims			
	WG WB WR WA	CT4	
External Corner (two part) Ex	ternal corner foile	ed	
-	WG WB WR WA	CT5	
Internal Corner (two part) Int	ernal corner foile	d	
	WG WB WR WA	СТ6	
Centre Joint Trim			
	WG WB WR WA	СТ7	
150mm Butt Joint Trim			
The state of the s	WG WB WR WA	CT8	

Woodgrain Fixings A4 Stainless Steel Pins/Nails with white plastic heads

Product	Colour	Size	Code
FloTop Pins (6			
•	B BR C AG	30mm	FP30
	B BR C AG	40mm	FP40
FloTop Nails			
•	B BR C AG	50mm	FN50
	B BR C AG	65mm	FN65

Product	Colour	Size	Code
Clad Pins (€			
	N/A	30mm	CP30
	N/A	50mm	CP50

Important when ordering: Please add colour reference to code:





Introduction to Rainwater Systems

FloPlast Rainwater Systems offer a wide choice of profile design, both traditional and modern, in a range of colours to suit all tastes and applications.

FloPlast Rainwater Systems come with a 10 Year Performance and Colour Guarantee on the black, white, brown, grey and anthracite ranges and 20 years for the "Cast Iron" style systems.

Register online - www.floplast.co.uk





FIOPLASE Rainwater Systems have been awarded the prestigious BSI Kitemark (KM 501316) except MiniFlo and "Cast Iron" Style.













Scan with your smart phone to find out further information on our rainwater systems.

Benefits and Featires:

- Practical rainwater handling systems which, unlike metal systems, do not conduct lightning.
- Suitable for all types of buildings including domestic, commercial and industrial.
- Components have a consistent finish and colour and are low maintenance.
- Tough and durable, yet lightweight for ease of installation, they will withstand normal ladder weight.
- High gloss finish with blemish free surface providing excellent all round weathering and colour fastness.
- Comprehensive range of systems, colours and fittings to provide solutions to all installation requirements.
- All large fittings are packaged individually to protect their surface from scratch marks.
- Cost effective solution to rainwater collection and drainage.
- Well defined stylish contours ensure a seamless match with the architecture of all properties, new or old.



Leaf/Weather Protection

Product	Colour	Code	
4m GutterBrush Debris eliminator			
	B W	GB4	
FloGuard: Leaf Protection System 5	m Pack		
S. JELS	В	FG1	
Balloon: Leaf Protection System			
Outlet Guard	В	OG1	
DrainGuard			
Fits round and square downpipe	В	DG1	
Snow/Tile Guard - 2m			
	N/A	SG1	
Snow/Tile Guard Bracket			
4	N/A	SG2	





Ancillaries

Product	Colour	Code
Universal Rise & Fall Bracket		
Not suitable for XtraFlo	N/A	RF1
Rafter Bracket Top Fix		
	N/A	RR1
Rafter Bracket Side Fix		
F	N/A	RR2
40ml Compressed Silicone Lubricant Spray		
	N/A	SL40

Product	Colour	Code	
8mm Universal Fascia Bracket Spa	cer		
¥	BW	RS9	
Suitable for Half Round, Square Line, Niagara Ogee	and Hi-Cap gut	ters only	
8mm Spacer Brackets For 68mm ro	und downբ	oipe	
Only use with RS2, RC4 & RB4	BW	RC9	
8mm Spacer Brackets For 65mm sq	uare down	pipe	
Only use with RSS2, RCS4 & RBS4	B W	RCS9	
Universal Rainwater Adaptor			
Connects to 110mm drainage	N/A	D96	








Half Round 112mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462

nali kvullu i i	211111	Standard: BS EN 607	, BS EN 12200 -1
Product		Colours	Code
Gutter - 2m / 3m / 4m			
	2m	B W BR G	RG2
	3m	B W BR G	RG3
	4m	B W BR G	RG4
Angle			
	90°	B W BR G	RA1
	135°	B W BR G	RA2
Adjustable Angle 50° -	156°		
		B W BR	RA3
Angle - Any Degree			
		B W BR G	RA9
FloPlast will fabricate any non-stand	ard angle to	special order. POA: Price	on application.
Running Outlet		B W BR G	RO1
Stopend Outlet			
		B W BR G	RO2
Stopend			
	External	B W BR G	RE1
	Internal	B W BR G	RE2
Fascia Bracket			
d		B W BR G	RK1

Product	Colours	Code		
Union Bracket				
	B W BR G	RU1		
To Cast Iron Ogee Gutter Adaptors				

	R/H	B W	RD3
1	L/H	B W	RD4

To Hair Round Cast Iron Adaptor				
5	B W BR G	RD5		













68mm Round Downpipe and Fittings Standard: BS EN 12200 - 1

	•	-	-
Product		Colour	Code
Pipe - 2.5 / 4 / 5.5m			
	2.5m	B W BR G	RP2.5
	4m	B W BR G	RP4
	5.5m	B W BR G	RP5.5
Offset Bends			
	92½°	B W BR G	RB1
	112½°	B W BR G	RB2
Shoes			
		B W BR G	RB3
4	With fixing lugs	B W	RB4
67½° Branch			
		B W BR G	RY1
Pipe Sockets			

B W BR G

B W

fixing lugs

RS1

RS2

Product	Colour	Code		
Pipe Clips				
~	B W BR G	RC1		
Single	Fix B W BR G	RC3		
fix	ith B W	RC4		
Access Pipe				
Pare H	B W BR	RX1		
Hopper: Connects to 65mm square & 68mm round downpipe				
	B W BR G	RHS1		

RB4 must be used in conjunction with RC4 and RS2. RC4 must be used in conjunction with RB4 and RS2. RS2 must be used in conjunction with RC4 and RB4.

For Downpipe adaptors see page 49

















Square Line 114mm	Standard: BS EN 60	07, BS EN 12200 -
Product	Colours	Code
Gutter - 2m / 3m / 4m		
2m	B W BR	RGS2
3m	B W BR	RGS3
4m	B W BR	RGS4
Angle		
90°	B W BR	RAS1
135°	B W BR	RAS2
Adjustable Angle 50° - 156°		
a live	B W BR	RAS3
Angle - Any Degree		
	B W BR	RAS9
FloPlast will fabricate any non-standard angle to sp	ecial order. POA: Price	on application
Running Outlet	T	
	B W BR	ROS1
Stopend Outlet		
	B W BR	ROS2
Stopends		
External	B W BR	RES1
Internal	B W BR	RES2
	î .	

S EN 1462	KM SOIL	MARK" KITEMARK"	KITEMARK*
Product	BS EN 6	Colours	Code
Union Bracket			
		B W BR	RUS1
Square/Round Gutte	Adaptor		
		B W BR	RDS1
To Cast Iron Gutter A	daptors		
	Ogee R/H	B W BR	RDS3
	Ogee L/H	B W BR	RDS4
*	Half Round	B W BR	RDS5
40ml Compressed Silic	one Lubrica	nt Spray	
		N/A	SL40





B W BR







Fascia Bracket

RKS1







65mm Square Downpipe and Fittings Standard: BS EN 12200-1

	•	-	
Product		Colours	Code
Pipe - 2.5 / 4 / 5.5m			
	2.5m	B W BR	RPS2.5
	4m	B W BR	RPS4
	5.5m	B W BR	RPS5.5
Offset Bend			
3	92½°	B W BR	RBS1
	112½°	B W BR	RBS2
Shoe			
		B W BR	RBS3
*	With fixing lugs	B W	RBS4
Adjustable Offset Be	end		
	_	B W BR	RBS5
Pipe Sockets			
		B W BR	RSS1

B W

fixing lugs

			BS EN 12200-1
Product		Colours	Code
Pipe Clips			
V		B W BR	RCS1
C	Flush	B W BR	RCS2
	Single Fix	B W BR	RCS3
	With fixing lugs	B W	RCS4
Sq/Rd Downpipe A	daptor: Con	nects to 68mm roun	d downpipe
		B W BR	RDS2

671/2° Branch

Square Access Pipe



B W BR

B W BR

RXS1

RYS1

Hopper: Connects to 65mm square & 68mm round downpipe







RBS1 must be used in conjunction with RCS4 and RSS2. RSS2 must be used in conjunction with RCS4 and RBS4. RCS4 must be used in conjunction with RBS4 and RSS2.

RSS2



Important when ordering: Please add colour reference to code: B Black W White BR Brown G Grey











Code

REN1

REN2

REN3

REN4

RKN1

RKN2

RUN1

RNR3

RNR4

RNS3

RNS4





Niagara Ogee 110mm Standard: BS EN 607, BS EN 12200 - 1, BS EN 1462

Mayara Uy		III Standard: BS E	N 607, BS EN 12	2200 - 1, BS EN 1462	KM 501316 KM 501316 BS EN 607 BS EN 1462
Product		Colours	Code	Product	Colours
Gutter - 4m				External Stopends	
	4m	B W BR	RGN4		L/H B W BR
90° Angle					R/H B W BR
U	Internal	B W BR	RAN1	Internal Stopends	
()	External	B W BR	RAN2		L/H B W BR
135° Angle				1	R/H B W BR
	Internal	B W BR	RAN3	Fascia Bracket	
	External	B W BR	RAN4		B W BR
Angle - Any Degree	2				Top Hung B W BR
1		B W BR	RAN9	Union Bracket	
FloPlast will fabricate any non-	standard angle to spe	cial order. POA: Price	on application	41 2	
Running Outlet - M	ulti Fit - 65mm Sq	uare/68mm Roun	d		B W BR
		B W BR	RON1	Niagara to Half Round Gutt	ter Adaptors
-				A1	R/H B W BR
Stopend Outlets - 6	55mm Square			100	
	L/H	B W BR	RON2	10	L/H B W BR
	R/H	B W BR	RON3	Niagara to Square Line Gut	ter Adaptors
-	K/ II	, m pw	NONS	A.	R/H B W BR
Running Outlet - 80	Omm Round			100	
		B W BR	RON4	1	L/H B W BR
Stopend Outlets - 8	30mm Round			For 68mm Round Downpipe see	page 15
-0.7	L/H	B W BR	RON5	For 65mm Square Downpipe see For 80mm Round Downpipe see	page 20
				For optimum performance of Ni recommend the use of FloPlast	

stems we recommend the use of FloPlast 65mm Square and 80mm round downpipe systems.





B W BR



RON6





RHS3





Hi-Cap 115mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462

Product	Colours	Price
Gutter - 4m		
4	n B W BR G	RGH4
Angle		
90)° B W BR G	RAH1
133	B W BR G	RAH2
An Degre		RAH9

FloPlast will fabricate any non-standard angle to special order. POA: Price on application.

Running Outlet

4	68mm	B W BR G	ROH1
4	80mm	B W BR G	ROH4

Union Bracket

	B W BR G	RUH1
--	----------	------


Floating Union Bracket

	B W	RUH2
--	-----	------

Stopend

External	B W BR G	REH1
Internal	B W BR G	REH2

For optimum performance of Hi-Cap gutter systems we recommend the use of FloPlast 68mm and 80mm round downpipe systems.



Square Line B W BR

















80mm Round Downpipe & Fittings Standard: BS EN 12200 -1

Product		Colours		Code
Pipe - 4m				
	4m B	WBR	G	RPH4
Offset Bend				
6	2½° B	WBR	G	RBH1
11	2½° B	W BR	G	RBH2
Shoe				
J	В	W BR	G	RBH3
Pipe Clip				
Singl	e Fix B	W BR	G	RCH3

		BS EN 12200-1
Product	Colours	Code
671/2° Branch		
	B W BR G	RYH1
Pipe Socket		
	B W BR G	RSH1
80mm Rainwater Adaptor: Connects 110mm Drainage		
	N/A	D97
Hopper		
	B W BR G	RHH1

Spare Gutter Seals

Product	Code
Half Round Gutter Seal	
/	RRS1
Square Line Gutter Seal	
/	RRSS1
Hi-Cap Gutter Seal	
/	RRHS1
Niagara Ogee Gutter Seal	
\checkmark	RRNS1
MiniFlo Gutter Seal	
/	RRMS1
XtraFlo Gutter Seal	
/	RRXS1

Spare Gutter Clips

Product

Half Round Gutter Clip		
J	B W BR G AG	RRC1
Square Line Gutter Clip		
U	B W BR AG	RRSC1
Hi-Cap Gutter Clip		
J	B W BR G AG	RRHC1
Niagara Ogee Gutter Clip		
U	B W BR AG	RRNC1
XtraFlo Gutter Clip		
J	B W G	RRXC1

Colours

Code











MiniFlo 76mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462

Product		Colours	Code
Gutter - 2m			
	2m	B W BR G	RGM2
Angle			
	90°	B W BR G	RAM1
	135°	B W BR G	RAM2
Running Outlet			
4		B W BR G	ROM1

Product	Colours	Code
Stopend Outlet		
	B W BR G	ROM2
Stopend		
	B W BR G	REM1
Bracket		
Fasci	B W BR G	RKM1
Unio	n B W BR G	RUM1

50mm Round Downpipe & Fittings Standard: BS EN 12200 -1

Product		Colours	Code
Pipe - 2m			
	2m	B W BR G	RPM2
Offset Bend			
	92½°	B W BR G	RBM1
11	12½°	B W BR G	RBM2
Shoe			
		B W BR G	RBM3

N 12200 - I		
Product	Colours	Code
67½° Branch		
d	B W BR G	RYM1
Pipe Clip		
O	B W BR G	RCM1
Pipe Socket		
	B W BR G	RSM1
MiniFlo Rainwater Diverter		
(8)	B W BR G	RVM1

MiniFlo Half Shed Pack

Product	Code
Half Shed Pack - Black only	
- WU	
4 6/	MS1
100	



Help reduce your carbon footprint with FloPlast's MiniFlo Half Shed Pack and Water butt, enabling you to conserve water, saving time and money on your garden. This system can be easily fitted to a standard 6^{ft} shed. See page 29 for our range of Water butts.

Pack includes:

- 2 x 1m Gutter, 1 x Union Bracket, 2 x Fascia Bracket,
- 1 x External Stopend, 1 x Stopend Outlet,
- 2 x 1m Downpipe, 2 x Offset bend, 2 x Pipe Clip, 1 x MiniFlo Diverter

Important when ordering: Please add colour reference to code: B Black W White BR Brown G Grey











XtraFio 170mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462



Product		Colours	Code
Gutter - 4m			
1	lm	B W G	RGX4
Angle			
	90°	B W G	RAX1
Running Outlet			
		B W G	ROX1
Fascia Bracket			
U		B W G	RKX1

Product	Colours	Code
Union Bracket		
	B W G	RUX1
Stopend		

B W G External REX1 B W G Internal REX2

40ml Compressed Silicone Lubricant Spray N/A SL40

bsi. for Soil and W KITEMARK

d: BS EN 1329, BS EN 1453

110mm Round Downpipe & Fittings Standard				
Product		Colours	Code	
Pipe - Plain Ended - 3	3 / 4m			
	3m	B W G	SP1	
The same of the sa	4m	BG	SP2	
Pipe - Single Socket -	· 3 / 4m			
	3m	B W G	SP3	
	4m	B W G	SP4	
Shoe				
€.		B W G	SP161A	
Pipe Clip				
25		B W G	SP82	
Offset Bend 135° (45°	°)			
0	Ring Seal Top Solvent Bottom	B W G	SP440	

Product	Colours	Code
92½° Soil Pipe Branch		
-	B W G	SP190
92½° Soil Pipe Access Bend		
P	B W G	SP169
Access Pipe		
Socket/ Spigot	B W G	SP274
Hopper		
	B W G	RHX1

Spigot/

Solvent Socket

B W G



SP435





ANTHRACITE GREY RAINWATER SYSTEMS







AG

AG

RE2

RK1

Internal

Half Pound 112 BS EN 1462

TIGHT NOUTE I I ZMM Standard: BS EN 607, BS EN 12200 -1,				
Product		Colours	Code	
Gutter - 4m				
	4m	AG	RG4	
Angle				
	90°	AG	RA1	
	135°	AG	RA2	
Angle - Any Degree				
		AG	RA9	
FloPlast will fabricate any non-sta	ndard angle to special	order. POA: Price	on application.	
Running Outlet				

	BS EN 607	BS EN 1462	BS EN 12200-1
Product		Colours	Code
Stopend Outlet			
		AG	RO2
Stopend			
U	External	AG	RE1

Fascia Bracket







AG

BS EN 1462

AG

RO1

Square Line 114mm Standard: BS EN 607, BS EN 12200 -1, B					
Product	Colours	Code			
Gutter - 4m					
4m	AG	RGS4			
Angle					
90°	AG	RAS1			
135°	AG	RAS2			
Angle - Any Degree					
	AG	RAS9			
FloPlast will fabricate any non-standard angle to special order. POA: Price on application.					
Running Outlet					
	AG	ROS1			

Product		Colours	Code
Stopend Outlet			
		AG	ROS2
Stopends			
	External	AG	RES1
	Internal	AG	RES2
Fascia Bracket			

Union Bracket		
N. C.	AG	RUS1

RKS1

ANTHRACITE GREY RAINWATER SYSTEMS



Hi-Cap 115mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462







Product		Colours	Code
Stopend			
4	External	AG	REH1
	Internal	AG	REH2
Fascia Bracket			
		AG	RKH1

Union Bracket

Eaccia Bracket



¹FloPlast will fabricate any non-standard angle to special order.

Niagara Ogee 110mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462





bsi.	bsi. PVC-U eaves gutters and fixings KITEMARK	bsi. Brackets for eaves gutters KITEMARK	DSi. PVG-U Reinwater Plping Systems KITEMARK	\ /
	KM 501316 BS EN 607	KM 501316 BS EN 1462	KM 501316 BS EN 12200-1	

RUN1

1,05 2.1 1.02	KM 501316 BS EN 607	KM 501316 BS EN 1462	KM 501316 BS EN 12200-1
Product		Colours	Code
Stopend Outlets - 65mm Squa	are		
- Carlo			DONO

The same of	L/H	AG	RON2
The state of the s	R/H	AG	RON3
External Stonends			

External Stopends			
	/Н	AG	REN1
R	/Н	AG	REN2

rascia Diacket		
U	AG	RKN1
Union Bracket		

illoll blacket	
	AG

Important when ordering: Please add colour reference to code: AG Anthracite Grey

AG

RON1

ANTHRACITE GREY RAINWATER SYSTEMS







68mm Round Downpipe & Fittings Standard: BS EN 12200 -1

Don Lord		C-1	Colo
Product		Colours	Code
Pipe - 2.5 / 4 / 5.5m			
	2.5m	AG	RP2.5
	4m	AG	RP4
	5.5m	AG	RP5.5
Offset Bends			
P-	92 ½°	AG	RB1
L	112½°	AG	RB2
67½° Branch			
P		AG	RY1
Shoes			

Product	Colours	Code	
Pipe Sockets			
	AG	RS1	
Pipe Clip			
\mathcal{N}	AG	RC1	
Access Pipe			
9	AG	RX1	
Hopper: Connects to 65mm square and 68mm round downpipe			
	AG	RHS1	





65mm Square Downpipe & Fittings Standard: BS EN 12200-1

RB3

osiiiiii squai e boi			-90 3
Product		Colours	Code
Pipe - 2.5 / 4 / 5.5m			
	2.5m	AG	RPS2.5
	4m	AG	RPS4
	5.5m	AG	RPS5.5
Offset Bend			
	92½°	AG	RBS1
3	112½°	AG	RBS2
Shoe			
		AG	RBS3
Pipe Sockets			
		AG	RSS1

		BS EN 12200-1	
Product	Colours	Code	
Adaptor: Connects to 68mm round downpi	pe		
•	AG	RDS2	
Pipe Clips			
~	AG	RCS1	
67½° Branch			
4	AG	RYS1	
Square Access Pipe			
7	AG	RXS1	
Hopper: Connects to 65mm square and 68mm round downpipe			
	AG	RHS1	





Half Round 112mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462

Product	10000	Colours	Code
Gutter - 2m / 4m			
	2m	CI	RG2
	4m	CI	RG4
Angle			
	90°	CI	RA1
	135°	CI	RA2
	any degree	CI	RA9
FloPlast will fabricate any non-star	ndard angle to special	order.	
Running Outlet - 68n	nm round		
-		CI	RO1
Stopend Outlet - 68mm round			
		CI	RO2

3 LN 1402		•	
Product	That I'm	Colours	Code
Stopend			
	External	CI	RE1
	Internal	CI	RE2
Bracket			
	Fascia	CI	RK1
	Union	CI	RU1
Cast Iron adaptors			
	Ogee R/H	CI	RD3
	0gee L/H	CI	RD4
	To Half Round	CI	RD5

Hi-Cap 115mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462

		,	.,
Product		Colours	Code
Gutter - 4m			
	4m	CI	RGH4
Angle			
60	90°	CI	RAH1
	135°	CI	RAH2
60	any degree	CI	RAH9
FloPlast will fabricate any non-s	tandard angle to special	order.	
Running Outlet - 68	mm round		
		CI	ROH1

Product	Colours	Code
Stopend		
Externa	d CI	REH1
Interna	d CI	REH2
Fascia Bracket		
U	CI	RKH1
Union Bracket		
	CI	RUH1
40ml Compressed Silicone Lubrica	nt Spray	
	N/A	SL40

Important when ordering: Please add colour reference to code: CI "Cast Iron" Style





68mm Round Downpipe and fittings Standard: BS EN 12200 -1

Product	Colours	Code
Pipe - 2.5m		
	CI	RP2.5
Offset Bend		
92½°	CI	RB8
3 112½°	CI	RB6
Shoe		
r	CI	RB4 ¹
Pipe Clip		
2a	CI	RC4 ¹

Product	Colours	Code
Pipe Socket		1.91(1.000)
	CI	RS2 ¹
67½° Branch		
•	CI	RY1
Access Pipe		
PAR	CI	RX1
Square/Round Downpipe Adaptor		
T	CI	RDS2

¹With fixing lugs (Requires 2 x FC50 fixings)

Gutter Clips

Product	1000	Colours	Code
Gutter Clip			
9	Round	CI	RRC1
U	Niagara	CI	RRNC1
J	Hi-Cap	CI	RRHC1

Gutter Seals

Product		Code
Gutter Seals		
/	Round	RRS1
\checkmark	Niagara	RRNS1
/	Hi-Cap	RRHS1



Important when ordering: Please add colour reference to code: CI "Cast Iron" Style





Niagara Ogee 110mm Standard: BS EN 607, BS EN 12200 -1, BS EN 1462

Product	Colours	Code	
Gutter - 3m / 4m			
3n	CI	RGN3	
4n	CI	RGN4	
90° Angle			
Interna	CI	RAN1	
Externa	CI	RAN2	
135° Angle			
Interna	CI	RAN3	
Externa	CI	RAN4	
Angle - Any Degree			
	CI	RAN9	
FloPlast will fabricate any non-standard angle to special order. POA: Price on application.			
Running Outlet - Multi Outlet			
-	CI	RON1	

-1, BS EN 1462		•	- ALICHARD STREET
Product	12.00	Colours	Code
Stopend Outlet - 65mm Sq	uare		
•	L/H	CI	RON2
	R/H	CI	RON3
Stopend - External			
6	L/H	CI	REN1
	R/H	CI	REN2
Stopend - Internal			
	L/H	CI	REN3
	R/H	CI	REN4
Bracket			
U	Fascia	CI	RKN1
	Union	CI	RUN1

65mm Square Downpipe and fittings Standard: BS EN 12200-1

•			
Product		Colours	Code
Pipe - 2.5m			
		CI	RPS2.5
Offset Bend			
	92½°	CI	RBS8
3	112½°	CI	RBS6
Shoe			
8	With fixing lugs Requires 2 x FC50 fixings	CI	RBS4

Product		Colours	Code
Pipe Clip			
	With fixing lugs Requires 2 x FC50 fixings	CI	RCS4
Pipe Socket			
	With fixing lugs Requires 2 x FC50 fixings	CI	RSS2
67½° Branch			
1		CI	RYS2

Important when ordering: Please add colour reference to code: CI "Cast Iron" Style





Hoppers Standard: BS EN 12200 -1

Product	Colours	Code
Universal Hopper: Connects to 65mm squa	re and 68mm ro	und downpipe
	CI	RH1
Ogee Hopper: Connects to 65mm square and 68mm round downpipe		
F	CI	RH4
With fixing lugs (Requires 2 x FC50 fixings).		
Rectangular Hopper: Connects to 65mm square and 68mm round downpipe		
	CI	RH5

With fixing lugs (Requires 2 x FC50 fixings). This product is rotationally moulded and subject to bowing along its length up to \pm -4%.

Please note: If a larger outlet is required please contact our technical department on 01795 431731

Features and Benefits:

- Traditional look.
 - No painting required.
- Lightweight and resilient material.
- Corrosion free.
- Hoppers available in three different styles.
- Motifs available in 4 different styles to enhance hoppers.

Fixing instructions for the FC50 (Cast Iron fixing bolts)

The FC50 is a 12 gauge x 50mm Stainless Steel Bolt, that requires a12mm socket to tighten it. When using these fixings on Ogee and Rectangular Hoppers we recommend that a 3/4" tap washer is used.

When fixing product to concrete, brick, block etc fix FC50 in the same way as any other screw by using a plug type fixing, and into timber by pilot drilling a starter hole first.

Motifs for Hoppers

Product	Code
Fleur-de-Lis	
	FL55 ¹
	FL70 ²
Tudor Rose	
40mm	TR55 ¹
55mm	TR70 ²
Decorative Square	
40mm	DS55 ¹
70mm	DS70 ²
Lion's Head	
75mm	LH55 ²
90mm	LH70 ²

¹Motifs can be used with RH4 and RH5 ²Motifs cannot be used with RH4

Accessories and Fittings

Product	Colours	Code
Cast Iron Fixings CE		
	CI	FC50
12 gauge x 50mm stainless steel fixings for "Cast Iron" Ra	inge (Socket fixino	ıs).

Product	Colours	Code
Rainwater Diverter		
	CI	RVS1

Important when ordering: Please add colour reference to code: CI "Cast Iron" Style

RAINWATER HARVESTING





StormSaver Rainwater Harvesting Standard: BS 8515



With the average home owner using around 150 litres of water per day, the StormSaver rainwater harvesting system will enable the metered home owner to recycle rainwater and potentially reduce their bills by up to 50%, whilst remaining kinder to the environment. StormSaver can also alleviate pressure on local drainage in line with Sustainable Drainage Schemes (SuDS), to help prevent flood risk.

Benefits of using StormSaver:

- Uses over 75% less energy than other traditionally pumped Rainwater Harvesting systems.
- Low decibel rating.
- Flow Rate of 10 litres per minute (same as mains pressure).
- Compact control unit.
- Cost effective.
- The shallow dig tank is robust and comes with all the necessary components.
- Ideal for new build properties and homes with up to 6 bedrooms.

Product	Size	Code
StormSaver Packages		
	1500	S1500
The second secon		

	1500	S1500
	3000	S3000
	5000	S5000
10 Sec. 1	7500	S7500

Size is in litres

Package includes:

- Underground storage tank
- 235mm Entrance shaft
- Pedestrian duty lid for tank
- Control panel
- 1/2" Boosted floating suction filter kit
- 20m ½" Flexible suction hose



Pedestrian Duty Lid

Product	Size	Code
Entrance Shaft		
	225	FCCCF

235mm	ES235	
635mm	ES635	

Control Panel (6



1/2" Boosted Floating Suction Filter Kit



1/2" Flexible Suction Hose

20mm	H20
40mm	H40

Product	Size	Code
Level Sensor		



Identification Tape and Label Pack

ID1



110mm Non-Return Valve-Single Flap

· CE	D550	

Required for the system to comply with BS 8515

RAINWATER HARVESTING





RVS1

Product	Colour	Code
Rainwater Diverter		
19	B W BR G	RVS1
Connects to 65mm square and 68mm round downpipe		
Anthracite Rainwater Diverter		

AG

Connects to 65mm square and 68mm round downpipe

Cast Iron Rainwater Diverter



Connects to 65mm square and 68mm round downpipe

Colour **Product** Code

Rainwater Diverter

B W BR G RVH1 Connects to 80mm Round Downpipe

MiniFlo Rainwater Diverter

B W BR G RVM1

Connects to 50mm Round Downpipe

Connector Kit

S

B W RVS2

Not kitemarked

EcoFlo Rainwater Storage

Product	Code
100L Slim Water Butt	
	WB100
1001 Clim Water Butt Stand	



ST100

Product Code 210L Water Butt



WB200

200L Water Butt Stand



ST200

100L SLIM WATER BUTT

- 100L capacity.
- Space saving water butt ideal where space is at a premium.
- Supplied with tap and lid.
- Manufactured in the UK from recycled materials.

Dimensions

Water Butt: Stand:

32cm (121/2") Length 33cm (13") Length 36cm (14") Width 33cm (13") Width 95.2cm (37½") Height 30.5cm (12") Height

210L WATER BUTT

- 210L capacity
- Traditional shape water butt with a large capacity.
- Supplied with tap and lockable lid.
- Manufactured in the UK from recycled materials.

Dimensions

Water Butt: Stand:

57cm (251/2") Diameter 53cm (21") Diameter 97cm (391/2") Height 31cm (12") Height

Important when ordering: Please add colour reference to code: B Black W White BR Brown G Grey CI Cast Iron AG Anthracite Grey



















Introduction to Soil & Waste Systems

FIOPLASE offer a comprehensive choice of soil and waste systems and products, in a range of sizes and colours, to suit all tastes and applications.

Here are a list of features and benefits:

- Comprehensive, integrated and modern range of products and systems for all soil and waste applications.
- Components have a consistent high gloss finish and colour and are low maintenance.
- Tough and durable, yet lightweight for ease of installation.
- Compatible with most other existing materials and systems manufactured to British/European Standards.
- Manufactured to British/European Standards specification where applicable.
- Colour matching between systems facilitates colour co - ordination where sanitary pipework is located externally.

Air Admittance Valves

FloPlast Air Admittance Valves have been awarded the prestigious BSI Kitemark (KM 512474) and are A1 rated in accordance with BS FN 12380.



AX110 - External Air Admittance Valve

The External Air Admittance Valve complements the existing range of Internal Air Admittance Valves.

The external version eliminates the need for the installer to work and handle pipes above the roof line, therefore making it easier to comply with Work at Height (WAHR) and Manual Handling Regulations.

"Cast Iron" Style Ring Seal Soil System PVC-U

The **FIOPlast** "Cast Iron" Style Rainwater and Soil Systems offer the authentic look of Cast Iron with all the benefits of PVC. This soil system complements the well established Half Round, Niagara & Hi-Cap "Cast Iron" Style Rainwater Systems.

- All sockets come complete with a "Cast Iron" style shroud.
- Full PVC-U system.
- 20 year "Cast Iron" Style Guarantee.
- 1.8m pipes for the traditional look.
- Pipe clips also replicate the traditional cast iron style.
- Strap on boss extra care should be taken when solvent welding the strap on boss as any excess solvent will be detrimental to the "Cast Iron" effect. Alternatively use external grade silicone sealant.

FloPlast 32/40/50mm ABS Solvent Weld, 110mm Solvent and Ring Seal Soil Products have been awarded the BSI Kitemark.





Code



Size

Air Admittance Valves Material: PVC-U/ABS Standard: BS EN 12380 Attestation Level 4

Product

Product	Colour	Colour Size				
Air Admittance Valve Push-Fit						
	B G W	110mm/ 82mm	AF110			
For 82mm solvent connection, r	emove seal from 110	mm push-fit.				
Air Admittance Valve Solvent						
	B G W	110mm	AV110			

-		32mm				
	W	40mm	AF32			
		50mm				
Universal adaptor to fit 32mm/40n	nm/50mm Solvent	Waste Pipe.				
Air Admittance Valve Compression						
	w	32mm	AV32			
	w	40mm	AV40			
En E	w	50mm	AV50			
This product is not CE marked unde	er the Construction	Products Regula	ations 2011.			

Colour

Air Admittance Valve Solvent ←

B G W

110mm-Pushfit/82mm-Solvent.

External Air Admittance Valve 🤇 €

1329-1, BS 5627

110mm/

82mm

AX110

Soil-WC Connector	Material: Polypropylene	Standard: BS EN	
Product	Colour	Code	
Swan neck			
	w	SP100	
Straight			
	w	SP101	
Offset			
	w	SP102	
90° Bend			
00	w	SP103	
250mm Extension			
	w	SP104	

Product	Colour	Code
Flexible		
	w	SP106
14° Connector		
	w	SP108











110mm Ring Seal Soil	Material: PVC-U	Standard: BS EN	N 1329-1, BS EN 4514, BS EN 1453-1	KITEMA KM 54433 BS EN 133		KITEMARK* KM 572704 BS EN 1453
Product	Colour	Code	Product		Colour	Code
Pipe-Plain Ended - 3 / 4m			Access Bend			
3m	B G W	SP1				
4m	BG	SP2		92½° (87½°)	B G W	SP169
Pipe-Single Socket - 1 / 3 / 4m			Adjustable Bend 0-9	no°		
1m	B G W	SP8	Adjustable bella 0 2			
3m	B G W	SP3		PP - do not solvent weld	B G W	SP560
4m	B G W	SP4	O#+ D 1259 (4)	-0)		
Pipe/Socket Clip			Offset Bend 135° (45)		
Pipe Clip	B G W	SP82		Ring Seal Top Solvent Bottom	B G W	SP440
Socket Clip	BG	SP83		JOIVEIN DOCTOR		
Socket Pipe Coupling			•	Spigot/ Solvent Socket	B G W	SP435
Double	B G W	SP105	Branch			
Single	B G W	SP124	4	92½° (87½°)	B G W	SP190
Access Pipe						
Socket/Spigot	B G W	SP274	7	112½° (67½°)	B G W	SP200
Socket/Solvent	В G	SP275	4	135° (45°)	B G W	SP210
Socket	БС	35273	Double Branch			
Bend			- 120			
92½° (87½°) Socket/Spigot	B G W	SP161	Way .	92½° (87½°)	B G W	SP230
June 1/3 pigut			Corner Branch (Spec	ial order on	ly)	
92½° (87½°) Double Socket	B G W	SP561	4	92½° (87½°)	B G W	SP232
112½° (67½°)		CD163	POA = Price on Application			
Socket/Spigot	B G W	SP162	Access Branch			
135° (45°) Socket/Spigot	B G W	SP163		92½° (87½°)	B G W	SP502
•			Screwed Access Cap			
135° (45°) Double Socket	B G W	SP563			B G W	SP292







			XM 544 BS EN 1	329-1 BS EN 1329-1	KM 572704 BS EN 1453
Product	Colour	Code	Product	Colour	Code
Socket Plug			Vent Terminal		
	B G W	SP296		B G W	SP302
Strap Boss			Extract Cowl		
S	B G W	SP319		B G W	SP310
Boss Pipe			500 x 600mm Weathering Slate		
Socket/Spigot	B G W	SP581	•	N/A	SP320
Socket/Solvent	Tardent/Calcust		Boss Adaptor - Rubber Push-Fit		
Socket	BG	SP582	32mm	N/A	SP10
			40mm	N/A	SP11
Short	B G W	SP583	50mm	N/A	SP12
Soil Manifold (32/40/50mm Con	nactions)		Solvent Boss Adaptor		
Son Manifold (32/40/30min Con	ilections)		32mm	B G W	SP20
One open boss	BG	SP588	40mm	B G W	SP21
			50mm	B G W	SP22
Weathering Collar			110mm Fire Protection Collar	C €	
a	B G W	SP300		N/A	FC110
			(FC55, FC82 & FC160 available to order)		

Reducers Material: PVC-U Standard: BS EN 1329-1, BS 4514, BS EN 1453-1

Product	Colour	Code	Product	Colour	Code
110mm Waste Adaptor			Universal Waste Adaptor (32	2/40/50mm)	
9	B G W	SP95		N/A	D95
To reduce to 32mm, 40mm or 50mm waste, use a	ppropriate Boss Ada	ptor.	Drain Connector		
110x68mm Rainwater					
	B G W	SP96		B G	SP107
	Universal Pipe Connector				
110x82mm Soil					
	G	SP97		B G	SP140
			(Adapts to soil/clay/Cl/drainage)		

"CAST IRON" STYLE SOIL & WASTE SYSTEMS





110mm Ring Seal Soil Material: PVC-U Standard: BS EN 1329-1, BS EN 4514, BS EN 1453-1

1 10111111 King Seal Soll Mate	rial: PVC-U	Standard: BS EN	1329-1, BS EN 4514, BS EN 1453-1	,	The state of the state of
Product	Colour	Code	Product	Colour	Code
Pipe-Plain Ended - 1.8m			Double Branch - Complete with soc	ket shroud	I
	CI	SP9	92½° (87½	e°) CI	SP230
110mm Pipe Coupling (Requires 2 x	FC65 fixi	ngs)	Access Pipe - Complete with socket	shroud	
	CI	SP115	Socket/Spig	ot CI	SP274
Pipe Clip (Requires 2 x FC65 fixings)			Boss Pipe - Complete with socket sh	roud	
U	CI	SP84	Socket/Spig	ot CI	SP581
8mm Pipe Spacer Bracket			Strap Boss		
	CI	SP89	0	CI	SP319
Bend - Complete with socket shroud Solvent cement can be used with caution, alternatively use external silicone sealant.					
92½° (87½°) Socket/Spigot	CI	SP161	110mm Vent Terminal	CI	SP302
92½° (87½°) Double Socket	CI	SP561	110mm Weathering Collar		
135° (45°) Socket/Spigot	CI	SP163	46	CI	SP300
			500x600mm Weathering Slate		
135° (45°) Double Socket	CI	SP563	•	N/A	SP320
Access bend - Complete with socket shro	oud		Cast Iron Fixings*		
92½° (87½°)	CI	SP169		CI	FC65
Branch - Complete with socket shrou	1				
92½° (87½°) With side bosses	CI	SP190	*12 gauge x 65mm Stainless Steel fixings (Socket Fixings). The FC65 is a 12 gauge x bolt, that requires a12mm socket to tight	65mm Stain	
92½° (87½°) Without side bosses	CI	SP192	When fixing product to concrete, brick, b same way as any other screw by using a p into timber by pilot drilling a starter hole	lug type fixi	

Important when ordering: Please add colour reference to code: C1 "Cast Iron" Style



110mm Calvant Cail 1, BS EN 4514, BS EN 1453-1



110mm Solvent	Soil Materi	al: PVC-U Sta	ndard: BS EN 132	29-1
Product		Colour	Code	
Pipe-Plain Ended - 3 /	4m			
	3m	B OG	SS1	
	4m	B OG	SS2	
Pipe Clip				
2		В OG	SS82	
Pipe Coupling				
	Double Socket	B OG	SS106	
	Single Socket Solvent/Ring Seal	B OG	SS107	
Offset Bend 135° (45°)				
4	Ring Seal Top Solvent Bottom	В OG	SS440	
	Spigot/Socket	В ОС	SS435	
Bend				
	92½° (87½°) Double Socket	В ОС	SS561	
	135° (45°) Double Socket	B OG	SS563	
	90° Spigot/socket	B OG	SS168	
Access Bend				
	92½° (87½°) Double Socket	В ОС	SS569	
Branch				
•	92½° (87½°) Triple socket	В ОС	SS191	
30	135° (45°) Triple socket	В ОС	SS211	

Product		Colour	Code
Access Branch			
•	92½° (87½°) Triple Socket	В ОС	SS503
Vent Terminal			
4iin		В ОС	SS302
Short Boss Pipe			
3		B OG	SS583

Strap Boss		
0	В ОС	SS319
Boss Adaptor		

Access Pipe			
	50mm	B OG	SS22
	40mm	B OG	SS21
	32mm	B OG	SS20

•	Double Socket	ВО	SS275
Savoured Assess Com			

•	B OG	SS292



Important when ordering: Please add colour reference to code: B Black OG Olive Grey





ANTHRACITE GREY SOIL & WASTE SYSTEMS



NEW 110mm Ring Seal Soil Material: PVC-U Standard: BS EN 1329-1, BS EN 4514, BS EN 1453-1



Pipe-Single Socket - 3m	NEW 110mm king Sear Se				KM 544331 BS EN 1329-1	KM 563460 BS EN 1329-1	KM 572704 BS EN 1453
SP1	Product	Colour	Code	Product		Colour	Code
Pipe-Single Socket - 3m Double Branch SP3 Screwed Access Cap Specilip Act SP82 Socket Pipe Coupling Socket Pipe Coupling Socket Pipe Coupling Socket Pipe Act SP105 Bend Sp105 Short Boss Pipe Socket Spigoti Act Sp161 Sp561 Vent Terminal Sp563 Access Bend Sp663 Access Bend Sp664 Sp664 Access Pipe Sp664 Access Pipe Sp664 Sp664 Access Pipe Sp664 Sp664 Sp664 Sp664 Access Pipe Sp664 Sp	Pipe-Plain Ended - 3m			Branch			
SP23	3m	AG	SP1	•	92½° (87½°)	AG	SP190
Pipe Clip Ac SP82 Ac SP29 Ac SP29 Ac SP29 Socket Plug	Pipe-Single Socket - 3m		Double Branch				
Socket Pipe Coupling	3m	AG	SP3		92½° (87½°)	AG	SP230
Socket Plug	Pipe/Socket Clip			Screwed Access Cap			
Single AG SP124 AG SP29	Pipe Clip	AG	SP82			AG	SP292
Strap Boss Strap Boss Span	Socket Pipe Coupling			Socket Plug			
Bend Spin S	Single	AG	SP124			AG	SP296
Short Boss Pipe Sp58 Sp5	Dauble	AC	CD10F	Strap Boss			
SP161 SP58 Solvent Boss Adaptor SP58 Solvent Boss Adaptor SP58 Solvent Boss Adaptor SP58	Bend	AG	SP105	0		AG	SP319
SP161 92½° (87½°) (Double Socket) Sp561 135° (45°) (Socket/Spigot) AC SP563 Solvent Boss Adaptor 32mm AC SP20 Solvent Boss Adaptor 32mm AC SP20 ACcess Bend SP169 Adjustable Bend 0-90° (PP - do not solvent weld) SP560 ACCESS Pipe (Socket/Spigot) AC SP560 SP560 ACCESS Pipe (Socket/Spigot) AC SP274 Material: PVC-U/ABS Standard: BS EN 12380 Attestation Level 4 External Air Admittance Valve (External Air Admitta	Q214° (8714°)			Short Boss Pipe			
Code	(Socket/Spigot)	AG	SP161	-		AG	SP583
SP163 Sp163 Sp163 Solvent Boss Adaptor Solvent Boss Adaptor Solvent Boss Adaptor Sp20 Access Bend Sp20 Access Bend Sp169 Adjustable Bend 0-90° Adjustable Bend 0-90° Product Sp560 Sp560 Access Pipe (Socket/Spigot) AG Sp274 Material: PVC-U/ABS Standard: BS EN 12380 Attestation Level 4 Product Colour Size Cod External Air Admittance Valve (5 Access Pipe AG Sp274 Sp560 ACCESS Pipe AG Sp274		AG	SP561	Vent Terminal			
Access Bend 92½° (87½°) AG SP169 Adjustable Bend 0-90° (PP - do not solvent weld) (PP - do not solvent weld) AG SP560 Access Pipe (Socket/Spigot) AG SP274 AG SP169 Material: PVC-U/ABS Standard: BS EN 12380 Attestation Level 4 Product Colour Size Cod External Air Admittance Valve (€ 110mm-Pushfit/82mm-Solvent.		AG	SP163	ETA		AG	SP302
(Double Socket) Access Bend 92½° (87½°) AG SP169 Adjustable Bend 0-90° (PP-do not solvent weld) (Socket/Spigot) AG SP260 Product Colour Size Cod External Air Admittance Valve (€ 110mm-Pushfit/82mm-Solvent.				Solvent Boss Adaptor			
Product Colour Size Code External Air Admittance Valve (€ Access Pipe (Socket/Spigot) AG SP274 SP169 Material: PVC-U/ABS Standard: BS EN 12380 Attestation Level 4 Product Colour Size Code External Air Admittance Valve (€ 110mm-Pushfit/82mm-Solvent.		AG	SP563		32mm	AG	SP20
92½° (87½°) Adjustable Bend 0-90° (PP - do not solvent weld) (PP - do not solvent weld) (Socket/Spigot) AG SP274 AG SP274 Material: PVC-U/ABS Standard: BS EN 12380 Attestation Level 4 Product Colour Size Cod External Air Admittance Valve (€ 110mm-Pushfit/82mm-Solvent.	Access Rend				40mm	AG	SP21
Adjustable Bend 0-90° Product Colour Size Cod	600	AG	SP169			bsi.	bsi. Air Admittance
Product Colour Size Code External Air Admittance Valve CE Access Pipe (Socket/Spigot) AG SP274 Product Colour Size Code External Air Admittance Valve CE	2 .			Material: PVC-U/ABS Standard: BS	EN 12380 Attestation	Level 4	KITEMARK*
SP560 External Air Admittance Valve (External Air Admittance Valve (Sexternal Air Admittance Valv	Adjustable Bend 0-90°			Product	Colour	Size	
(Socket/Spigot) AG SP274 110mm-Pushfit/82mm-Solvent.		AG	SP560				Code
(Socket/Spigot) AG SP274 110mm-Pushfit/82mm-Solvent.	Access Pipe					110mm/	A V/110
110mm-Pushfit/82mm-Solvent.					AG		AX110
	(Socket/Spigot)	AG	SP274	110mm-Pushfit/82mm-Solvent.			
nportant when ordering: Please add colour reference to code: AG Anthracite Grey	mportant when ordering: Please add colour reference	e to code: Ac	Anthracite Grev				

ANTHRACITE GREY SOIL & WASTE SYSTEMS



NEW 32/40mm ABS Solvent Weld Material: ABS Standard: BS EN 1455-1



							KM 518614 BS EN 1455-1
Product	Colour	Size	Code	Product	Colour	Size	Code
Wastepipe - 3m				Tee			
	AG	32mm	WS01		AG	32mm	WS22
	AG	40mm	WS02		AG	40mm	WS23
Straight Coupling				Conversion Bend 90°			
	AG	32mm	WS07	4	AG	32mm	WS26
	AG	40mm	WS08		AG	40mm	WS27
Bend 90°				Access Plug			
-	AG	32mm	WS10		AG	32mm	WS30
0	AG	40mm	WS11	U	AG	40mm	WS31
Bend 92½° (87½°)				Pipe Clip			
4 - 0	AG	32mm	WS14	-	AG	32mm	WS34
	AG	40mm	WS15		AG	40mm	WS35
Bend 135° (45°)				Reducer			
	AG	32mm	WS18		AG	40x32mm	WS38
	AG	40mm	WS19		AG	50x32mm	WS39



Important when ordering: Please add colour reference to code: AG Anthracite Grey





32/40/50mm ABS Solvent Weld Material: ABS						
Product	Colour	Size	Code			
Wastepipe - 3m						
40	B G W	32mm	WS01			
	B G W	40mm	WS02			
	B G W	50mm	WS03			
Straight Coupling		`				
	B G W	32mm	WS07			
	B G W	40mm	WS08			
	B G W	50mm	WS09			
Bend 90°						
	B G W	32mm	WS10			
100	B G W	40mm	WS11			
	B G W	50mm	WS12			
Bend 92½° (87½°)						
	B G W	32mm	WS14			
1000	B G W	40mm	WS15			
	B G W	50mm	WS16			
Bend 135° (45°)						
	B G W	32mm	WS18			
	B G W	40mm	WS19			
	B G W	50mm	WS20			
Tee	\ <u></u>					
	B G W	32mm	WS22			
	B G W	40mm	WS23			
	B G W	50mm	WS24			
Conversion Bend 90	0					
	B G W	32mm	WS26			
10	B G W	40mm	WS27			
	GW	50mm	WS28			
135°(45°) Conversior	Bend					
270	GW	32mm	WS76			

andard: BS EN 1455-1			KITEMARK** KM 518614 BS EN 1455-1
Product	Colour	Size	Code
Access Plug			
	B G W	32mm	WS30
C.	B G W	40mm	WS31
	B G W	50mm	WS32
Pipe Clip	,		
90	B G W	32mm	WS34
	B G W	40mm	WS35
	B G W	50mm	WS36
Reducer			
	B G W	40x32mm	WS38
-	BGW	50x32mm	WS39
	B G W	50x40mm	WS40
Branch 135° (45°)			
all l	w	32mm	WS42
-	GW	40mm	WS43
Level Invert Reducer			
	w	40x32mm	WS50
Cross Tee 92½° (87½°)		
	w	40mm	WS58
Tank Connector			
	GW	32mm	WS60
The state of the s	G W	40mm	WS61
Male Adaptor			
	w	32mm	WS63
A STATE OF THE PARTY OF THE PAR	w	40mm	WS64
Female Adaptor			
	w	32mm	WS66
and the second	w	40mm	WS67



40mm



WS77





32/40/50mm Push-Fit Waste Material: Polypropylene Standard: BS EN 1451-1, BS 5254

Product	Colour	Size	Code
Wastepipe - 3m			
	B G W	32mm	WP01
	B G W	40mm	WP02
	G	50mm	WP03
Straight Coupling			
	BGW	32mm	WP07
	B G W	40mm	WP08
	G	50mm	WP09
Bend 90°			
	BGW	32mm	WP10
0 40	BGW	40mm	WP11
	G	50mm	WP12
Bend 92½° (87½°)			
	B G W	32mm	WP14
0 0	B G W	40mm	WP15
	G	50mm	WP16
Bend 135° (45°)			
	BGW	32mm	WP18
	B G W	40mm	WP19
	G	50mm	WP20
Tee			
	B G W	32mm	WP22
-	B G W	40mm	WP23
8	G	50mm	WP24

Product	Colour	Size	Code			
Conversion Bend 90°						
	B G W	32mm	WP26			
0	B G W	40mm	WP27			
Socket Plug						
	BGW	32mm	WP30			
	BGW	40mm	WP31			
	G	50mm	WP32			
Pipe Clip						
	BGW	32mm	WP34			
	BGW	40mm	WP35			
	G	50mm	WP36			
Reducer						
	B G W	40x32mm	WP38			
	G	50x32mm	WP39			
	G	50x40mm	WP40			
Tank Connector						
	BGW	32mm	WP60			
	B G W	40mm	WP61			

Flexifio Connectors Material: PVC

Product	Colour	Size	Code
Coupling			
The state of	G	30-38mm	WF07
	G	38-45mm	WF08

Product	Colour	Size	Code
Elbow			
Tr.	G	40-48mm	WF11
A STATE OF	G	105-116mm	SP111









Code

TW472

TW475

TW476

TW477

TW473

TW474

TB33

TB37 TB47

TB37A TB47A

TB37T TB47T

Waste Traps Material: Polypropylene Standard: BS EN 274-1

Waste Iraps Mater	ial: Polypropylene	Standard: BS	S EN 274-1			
Product	Colour	Size	Code	Product	Colour	Size
P Trap - 38mm seal				Single Bowl Sink K	it - 76mm seal	
1 000	w	32mm	TP33	6	w	40mm
(Vin	W	40mm	TP43	-60-/		4011111
P Trap - 76mm seal				1 1/2 Bowl Sink Kit		
	W	32mm	TP37	- II	w	40mm
G.	W	40mm	TP47			40111111
S Trap - 38mm seal				Double Bowl Sink	Kit - 76mm seal	
Ta	w	32mm	TS33		w	40mm
UP !	w	40mm	TS43	P		4011111
S Trap - 76mm seal				Double Nozzle Tra	p - 76mm seal	
10	w	32mm	TS37		w	40mm
O.	w	40mm	TS47		V	4011111
Telescopic P Trap - 76m	m seal			Appliance Half Tra	ps - 76mm seal	
I	w	40	TD 47T	1	w	40.00.00
4)	W	40mm	TP47T			40mm
Shallow Bath Trap - 38r	nm seal			Appliance Half Tra	ps - 76mm seal	
2	w	40,000,000	TCD42	I.	w	40mm
	W	40mm	TSB42	= "	_ w	40mm
With cleaning eye and 20mm seal				Bottle Trap - 38mm	seal	
Low Level Bath Trap - 5	0mm seal				w	32mm
	w	40mm	TLB45		w	40mm
The state of the s				Bottle Trap - 76mm	seal	
Washing Machine Trap	1	1		-61	W	32mm
(A)	w	40mm	TW470	N/41	w	40mm
				Anti Vac Bottle - 76	imm seal	
Washing Machine Kit -	76mm seal			10	w	32mm
	w	40mm	TW471	6.30	w	40mm
0		10111111	7 * * 1,7 1	Telescopic Bottle T	rap - 76mm seal	
Includes 600mm stand pipe and 2 of				1	w	32mm
Running 'P' Trap - 76mi	m seal			10	w	40mm
	w	40mm	TR47			



Waste Traps Material: Polypropylene Standard: BS EN 274-1

7/ 1/				
Product	Colour	Size	Code	
Plain Swivel Elbow				
6	w	32mm	WC26	
	W	40mm	WC27	
Washing Machine T	ee			
M	w	40mm	TWT41	
Washing Machine/[Dishwasher N	ozzle		
0	w	40mm	THC40	
Overflow & Hose Co	nnector	1		
P	w	40mm	THC41	
Trap Height Adjustor				
Ť	w	32mm	TA33	
	w	40mm	TA43	
Telescopic Pedestal	Trap - 76mm	seal		
X	w	32x32mm	TD372T	

Product		Colour	Size	Code
Shower Traps				
	Plastic grid	w	40x19mm	TH41
	Chrome grid	W	40x19mm	TH43
-	Plastic grid	w	40x50mm	TH51
	Chrome grid	w	40x50mm	TH53
FastFlo S	hower Trap	•		
-		G	40x50mm	TH52
Wet Roor	n Shower Trap			
		w	40x50mm	TH54
Trap Seal Kits (4 piece)				
(2)	v	N/A	32mm	TK32
~ Q		N/A	40mm	TK40

"Chrome" Style Waste Traps Material: Polypropylene Standard: BS EN 274-1

32x40mm

TD374T

Product	Colour	Size	Code
Telescopic Bottle Trap 76	5mm seal		
	СН	32mm	CT37T
-	СН	40mm	CT47T

w

System Features

Patent No. GB2362658. Reg. Design No. 2092016

- Enhances the area for visible installations.
- Ideal for all public areas, hotels, pubs & restaurants.
- Fits ABS, PVC, Copper & Polypropylene pipes.
- Gives an authentic chrome effect.





Unicom Compression Waste Material: Polypropylene Standard: BS EN 1451-1, BS 5254

Product	Colour	Size	Code
Nastepipe - 3m*			
	w	32mm	WP01
	w	40mm	WP02
Also available in black and g	rey. See page 39.		
Straight coupling			
	w	32mm	WC07
	w	40mm	WC08
Bend 90°			
	w	32mm	WC10
	w	40mm	WC11
Adjustable Bend 0-9	90°		
ad Who	W	32mm	WC14
	w	40mm	WC15
Bend 135° (45°)	ì		
To a second	w	32mm	WC18
	w	40mm	WC19

Product	Colour	Size	Code
Tee			
	w	32mm	WC22
	w	40mm	WC23
Conversion Bend 90°			
C.	w	32mm	WC26
	w	40mm	WC27
Reducer			
	w	40x32mm	WC38
Flexi-Tube	'		
	w	32mm	FT32
	w	40mm	FT40

"Chrome" Style Unicom Compression Waste Material: Polypropylene Standard: BS EN 1451-1, BS 5254

Product	Colour	Size	Code				
Wastepipe (ABS) - 1.1m	Wastepipe (ABS) - 1.1m						
	CH	32mm	CW01				
	СН	40mm	CW02				
Straight Coupling							
	СН	32mm	CW07				
	СН	40mm	CW08				
Bend 90°							
4626	СН	32mm	CW10				
0	СН	40mm	CW11				

Product	Colour	Size	Code		
Tee					
T.	СН	32mm	CW22		
5	СН	40mm	CW23		
Pipe Clip					
0	СН	32mm	CW34		
70	СН	40mm	CW35		
Telescopic Bottle Trap 7	Telescopic Bottle Trap 76mm seal				
·馬	СН	32mm	CT37T		
	СН	40mm	CT47T		



21.5mm Overflow Waste Material: PVC-U

Product	Colours	Code
Overflow Pipe - 3m		
	B W	OS01
Straight Coupling		
0	B W	OS10
Bend 90°		
0	B W	OS11
Bend 135° (45°)	,	
	B W	OS12
Tee		
6	B W	OS13

100g Silicone Grease

800g Lubricant Gel

50g Lubricant Gel

40ml Silicone Spray

160

1200

75

600

120

950

59

420

100

800

50

400

60

450

28

225

Product		Colours	Code
Straight Tank Connector			
90		B W	OS14
Bent Tank Connector			
July .		B W	OS15
Pipe Clip			
6		B W	OS16
Overflow Waste Reducer			
	32mm	B W	OS17
	40mm	B W	OS18

Ancillaries					
Product		Code	Product		
40ml Compressed Silicone Lubrica	nt Spray		100g Silicone Grea	se	
		SL40			
50g Silicone Lubricant Gel			125ml Solvent Cem	ent 🤆	
		SL50			
800g Lubricant Gel			250ml Solvent Cem	ent 🤆	
		SG800			
Number of joints achievable (fo	r guidance c	only)	Number of joints a	chievabl	le (for g
Lubricant 32mm 40m	ım 50mm	110mm	Solvent Cement	32mm	40mm

Solvent Cement	32mm	40mm	50mm	110mm
125ml	27	27	27	7
250ml	55	55	55	15

Code

SG100

SC125

SC250





Introduction to Underground Drainage Systems

FioPlast Underground Drainage Systems are available in 110mm & 160mm sizes. All drainage pipes and the majority of fittings are manufactured from unplasticised Polyvinyl Chloride (PVC-U). Inspection chambers, 0 - 90° adjustable bend, gully traps and gully grids are manufactured from polypropylene.

Features and Benefits:

- Range includes 110/160mm pipe and fitting, channel drainage, and land drainage.
- Providing efficient means of waste water drainage & foul discharge from above ground drainage systems.
- Suitable for high temperature waste discharge.
- Most products manufactured in PVC-U to give a strong & durable product, lightweight and easy to work with.
- Fittings have an aesthetic modern look, are compact in size yet remain within the British Standard specification.









FloPlast socketed underground pipe incorporates the latest blown end technology. The easy fit rubber seal is held in place via a circular plastic insert allowing a retention of the seal in transit and a perfect connection for jointing.

All Push-Fit underground fittings have a captive seal and snap cap which are designed to be user-friendly - no sharp edges, and with space restrictions in mind, allow for an easy fit connection. The seal is double ribbed, and the sockets incorporate a recessed area to provide space for the rubber seal to locate as the pipe is inserted, forming a high-capacity pressure point.

FIOPLAST PVC-U pipes are supplied in secure bales bound with straps within timber frames, FIOPLAST recommend that the movement of bales is carried out by the fork lift or other mechanical device using webbing or rope strings.





The bales may be stacked up to a maximum of three high, providing that the timber frames are placed on each other. Fittings are generally supplied in plastic bags and should be

stored away from direct sunlight. If they have to be stored outside, the bags should be opened to prevent temperature build-up.







IIUmm	Pipe & Fittings Material: PVC-U	Standard: BS 4	4660, BS EN 1401-1, BS EN 13476-2	KM 544332 BS EN 1401-1
Product		Code	Product	Code
Pipe - 3 / 6	m		Rest Bends	
	Plain Ended 3m (Bale quantity 50) 6m	D043 D046	87½° Rest Bend	D571
	Perforated Plain Ended (Bale quantity 50) 6m	D046P	87½° Settlement Rest Bend	D570
	Single Socket 3m	D143	Large Radius Bends	
	(Bale quantity 50) 6m	D146	Eurge nadius benus	
Pipe Coup	ling		87½° Plain End	D281
	Single Socket Coupling	D124	37,2 18.11 2.10	
	Double Socket Coupling Removable centre stop for use as slip coupling	D105	45° Plain End	D283
Single Soc		D144	87½° Plain End with Channel Access	D581
<u></u>	(Socket/Spigot) 45° Bend (Socket/Spigot)	D161	45° PE with Channel Access	D583
	(SOCKET/Spigot)		Equal Junctions Double Socket	
	30° Bend (Socket/Spigot)	D164	87½° Junction	D190
-	15° Bend		45° Junction	D210
	(Socket/Spigot)	D167	Equal Junctions Triple Socket	
Double So	cket Bends		87½° Junction	D191
- TO			45° Junction	D211
San	87½° Bend	D561	Access Fittings	
	45° Bend	D563	87½° Access Bend (Socket/spigot)	D169
	30° Bend	D564	Access Pipe (Socket/spigot)	D274
	15° Bend	D567	Screwed Access Cap	D292
Adjustable	Bends		Channel Access Pipe	
	0-90° Adjustable Bend	D560	PE 1mtr	D870



110mm Fittings Material: PVC-U Standard: BS 4660, BS EN 1401-1, BS EN 124


Material: PVC-U Standard: BS 4	660, BS EN 140	I-1, BS EN 124	
Product	Code	Product	Code
Rodding Points		Bottle Gully Traps	
PVC Oval Rodding Point (Spigot)	D881	Bottle Gully Circular Grid	D510
PVC Oval Rodding Point (Socketed)	D882	Bottle Gully Square Grid	D515
PVC Square Rodding Point (Spigot)	D883	Bottle Gully Rectangular Grid	D520
PVC Square Rodding Point (Socketed)	D884	Back Inlet Bottle Gully Rectangular Grid	D530
(45° rodding point with sealed access cover suitable for loading up to where the frame of the cover is supported by a concrete plinth) Universal Traps	10kN (1 tonne)	Back Inlet Bottle Gully Circular Grid	D540
Universal Gully Trap (Socket/Spigot 45°)	D500	200mm Riser	D505
		Hopper and Grid	
Low Back 'P'Trap	D501	Round Hopper and Grid	D514
Leaf/Debris Interceptor Gully	D94	Square Hopper and Grid	D518
Spare Square Grid	D502	Rectangular Hopper and Grid	D524
Square Blank Cover Grid	D508	Drain Connector	
Cover dilu		Drain Connector	
Square Hopper Including Polypropylene Grid	D504	Available in B G	SP107
Postonelo Plank		Flexible Couplings, Connectors and Adaptors	
Rectangle Blank Cover Grid	D507	Coupling 98mm-115mm	D102
Rectangular Hopper Including Polypropylene Grid	D506	Adaptor A: 98mm-115mm B: 120mm-136mm	D103
110mm Non-Return Valve (6		Socket Plug	
110mm Non-Return Valve-Single Flap	D550		D296



110mm Fittings Material: PVC-U Standard: BS 4660, BS EN 1401-1

Product		Code
Adaptors		
9	110mm Waste Available in B W G	SP95*
9	110x68mm Rainwater Available in B W G	SP96
	Universal Waste (32/40/50mm)	D95
0	Universal Rainwater (Square/Round)	D96
	80x110mm	D97

Product		Code		
Adaptors				
	160x110mm Level Invert (Socket/Spigot)	D99		
	Supersleve Clay DS	D100		
	Hepsleve Clay DS	D101		
*To reduce to 32mm, 40mm or 50 waste, use appropriate Boss Adaptor, see page 35.				
DrainGuard				
	Fits round and square downpipe	DG1		

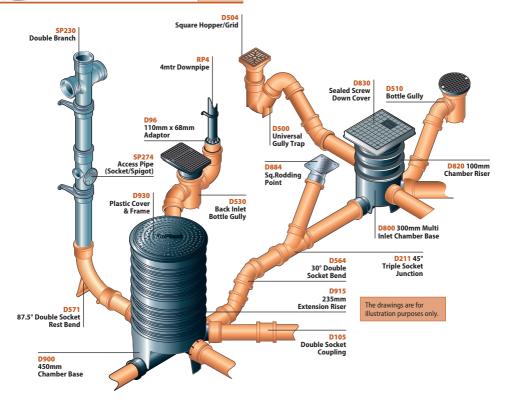









110mm Fittings Material: Polypropylene Standard: BS 4660, BS EN 1401-1, BS EN 124, BS EN 13598-1 & 2

3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	,	, , , , , , , , , , , , , , , , , , , ,	
Product	Code	Product	Code
Large Inspection Chamber - 450mm Diame	Mini Access Chamber - 300mm Diameter (MA	C)	
270mm Deep Chamber Ba 5x110mm flexible inle Supplied with 4 socket plug (Allows for 0-20° of movement	D900	270mm Deep Chamber Base 5x110mm flexible inlets Supplied with 4 socket plugs (Allows for 0-20° of movement)	D800
270mm Deep Chamber Ba 5x110mm fixed inle Supplied with 4 socket plug	b D910	270mm 45° Inlet Chamber Base 3x110mm flexible inlets Supplied with 2 socket plugs (Allows for 0-20° of movement)	D801
235mm Extension Ris (Can be cut to siz	13915	270mm 90° Inlet Chamber Base 3x110mm flexible inlets Supplied with 2 socket plugs (Allows for 0-20° of movement)	D802
235mm Extensic Riser and Se (Can be cut to siz	al D916	270mm 45° Inlet Chamber Base 3x110mm fixed inlets Supplied with 2 socket plugs	D810
Riser Sealing Rir (Use with each rise		100mm Chamber Riser With integral rubber ring (60mm cut down facility)	D820
450mm Plast Cover and Fram (A15 ratin	e D930	200mm Chamber Riser With integral rubber ring (60/100/150mm cut down facility)	D822
450mm Plastic Cover ar Frame with 350m restricted access (A15 ratin (For use with I.C. over 1.2mtr deep up to 3m	m D931	Square 340mm Sealed Plastic Screw Down Cover and Frame (A15 rating)	D830
Cast Iron Cover ar Plastic Frame (A15 ratin- (For replacement purposes on	D923	Round 300mm Sealed Plastic Screw Down Cover and Frame (A15 rating)	D831
Block Paving Cov 450mm Square/Rour		Block Paving Cover 300mm Square/Round	D932
450mm Ductile Iro	n	800g Lubricant Gel	
Cover/Frame (B125 rating (Conforms to the requirements of SfA	0,00		SG800
NEW 450mm Plastic Cov and Square Fram (A15 ratin	e D940		

D941

NEW 450mm Plastic Cover and Square Frame

(A15 rating) restricted access (For use with I.C. over 1.2mtr deep up to 3mtr)

To conform with document H Building Regulations H2015 use D930/D931/D940/D941 as required. 450mm inspection chamber covers are compatible with 160mm Inspection Chamber base.



160mm Pipe & Fittings Material: PVC-U/Polypropylene Standard: BS 4660, BS EN 1401-1, BS EN 13598-182, BS EN 13476-2, BS EN 124



	1 Pipe & Fittings Standard: BS 4660,		KM 563462 KM 563461 BS EN 13476-2 BS EN 1401-1	KM 544332 BS EN 1401-1	
Product		Code	Product	Code	
Pipe - 3 /	бm		Socket Plug		
	Plain Ended (Bale quantity 35) 6m	6D046	(1)	6D900P	
	Single Socket 3m	6D143	Equal Junctions		
Di G	(Bale quantity 35) 6m	6D146	87½° Junction (Double Socket)	6D190	
Pipe Coup	oling				
	Double Socket Coupling	6D105	45° Junction (Double Socket)	6D210	
Single So	cket Bends		87½° Junction	6D404	
	87½° Bend (Socket/spigot)	6D161	(Triple Socket)	6D191	
			45° Junction (Triple Socket)	6D211	
3	45° Bend (Socket/spigot)	6D163	160/110mm Unequal Junctions		
	30° Bend (Socket/spigot)	6D164	87½° Junction (Double socket)	6D198	
	15° Bend (Socket/spigot)	6D167	45° Junction (Double socket)	6D218	
Double Socket Bends		160mm Large Inspection Chamber - 450 Diameter (LIC			
	87½° Bend	6D561	160mm x 160mm 90° Chamber Base with two 45° 110mm Inlets	6D900	
	45° Bend	6D563	235mm Extension Riser (Can be cut to size)	D915	
	30° Bend	6D564	235mm Extension Riser and Seal (Can be cut to size)	D916	
	15° Bend	6D567	Riser Sealing Ring (Use with each riser)	D935	
Adaptors	160x110mm Level Invert (Socket/ spigot)	D99	450mm Plastic Cover and Frame (A15 rating)	D930	
9	CE Flexi-Adaptor Cast iron/160mm	6D102	450mm Plastic Cover and Frame with 350mm restricted access (A15 rating) (For use with I.C. over 1.2mtr deep up to 3mtr)	D931	
The state of the s	 C(€ Clay Adaptor A: 160mm-180mm B: 180mm-200mm 	6D104	Cast Iron cover and Plastic Frame (A15 rating)	D923	



FloDrain 110mm Domestic Channel Drainage Material: Polypropylene/Galvanised steel Standard: BS EN 1433 Attestation level 3

		rainage Material: Polypropylene/Galvanised steel Standard: BS EN 1433	
Product	Code	Product	Code
Channel Drain with Plastic Grate - 1mtr (Pallet o	D700	Channel Drain with Galvanised Grate - 1mtr (Pallet	pty 90) C
Drain Corner with Plastic Grate (6		Drain Corner with Galvanised Grate CE	
	D710		D720
Garage Pack with Plastic Grate (Pallet quantity	/16) (€	Garage Pack with Galvanised Grate (Pallet quanti	ty 16) 🤇
Christian Christ	D750	The second secon	D751
(Consists of 3x1m Channel lengths plus 1x End cap & 1x End outlet)		(Consists of 3x1m Channel lengths plus 1x End cap & 1x End outlet)	
Sump/Trap Unit and Basket with Plastic Grate	e (€	Sump/Trap Unit and Basket with Galvanised G	rate (
WILL STATE OF THE	D732	ALL STATES	D733
End Cap (€		Threshold Channel Drain - 1mtr (6	
V	D711	A CONTROL OF WATER	D730
End Outlet ((Channel Drain Jointing Clip	
Ø	D712		D734
Balloon Guard		Channel Drainage features and benefits:	
	D714	 Suitable for domestic areas where surface water colle driveways, pathways, patios, conservatories, swimmi sports areas, gardens, water features and retaining w 	ing pools, valls.
Corner Spacer (6		 Quality domestic surface Channel Drainage 110mm; Anti-slip heel guard grating. 	x Iuumm.
\$	D715	 Garage Pack available (3 x 1m lengths, End cap and 0 Manufactured to BS EN 1433, with a load class A15 - 4 outlets per length for maximum flexibility. Quad section for corners and junctions. Concave grid for maximum flow. 	



Ground Guard Lightweight ground reinforcement system suitable for pedestrian areas and light vehicle access

Ground Guard is a linked paving system, manufactured from Polyethylene, that provides a durable safe and eco-friendly surface for grass reinforcement, ground stabilisation and gravel retention for pedestrian and vehicle access areas.



Suitable for:

- Additional/overflow grass car parks.
- Walkways and disabled access routes.
- Golf buggy paths.
- Driveways and residential lawn parking.

Please visit www.floplast.co.uk for installation instructions.

Product		Code
GroundGua	ard Tiles	
	Pack of 20 = 3 square metres 1 Tile = 390 x 390 x 40mm	G40
WA)	Tested in excess of 200 tonnes per square metre spread load	G40

Land Drainage Standard: BS 4962, Licence No: KM557607

Land Drainage is used to remove excess water from fields and gardens, in fact any area where excessive water is a problem.

The perforations allow seeping water to ingress the pipe, capillary action then maintains the water within the pipe allowing it to flow to its destination i.e. Stormwater Attenuation Tanks, also known as Modular Plastic Geo Cellular Units (egg crates) or a watercourse (stream, lake etc).

Product	No Size O.D	Code
Couplings		
9	80mm	LC80
	100mm	LC100
Multi-Junction Branch		
	60/80/100mm	LJ100
Product		Code
Pipe		
Perforated Plain Ended	6m	D046P

(Bale quantity 50)

System Features:

- Perforated and coiled land drainage pipe is manufactured in HDPE.
- Normally used in agriculture and in building construction sites.
- Particularly beneficial in areas with heavy ground conditions i.e. clay.
- Relieves hydrostatic pressure.

Product	No Size O.D	Code
Land Drainage - 25m Coil		
	80mm x 25m	L8025
	100mm x 25m	L10025





MDPE SYSTEMS




Introduction to MDPE Systems

FloPlast 'Supreme' range offers everything you could ask of a compression fitting. They are suitable for use below ground on cold water services with polyethylene pipes manufactured in accordance with the requirements of BS EN 12201 - 2 (BLUE).

Features and Benefits:

- High Impact resistant Body and Nut which enables it to absorb thermal and mechanical stress.
- The fittings have a co-polymer polypropylene Body, Body Nut and Guide Ring, Acetal Grab Ring and Nitrile Seal.
- Excellent pressure resistance, tested to 48 Bar.
 Comfortably exceeds the performance requirements of UK Water Byelaws Scheme.
- Tested and approved by various testing institutes worldwide.
- Water Regulatons Advisory Scheme WRAS Approved (WRAS) product. 20mm to 110mm range of fittings.
- Simple and quick to connect:
 - to fit the pipe you don't need to dismantle the connector
 - you don't need to chamfer the pipe
 - you won't lose any pieces on the job site
 - no time wasted; just cut the pipe, insert pipe liner, lubricate the seal, undo the nut a few turns, push the pipe in as far as it will go, tighten the nut and it's done!







Medium Density Polyethylene Pipe (MDPE) 12 Bar Material: Polyethelene

	25m Coil	50m Coil	100m Coil	150m Coil	
Nom Size O.D	Code	Code	Code	Code	
20mm Pipe	111601	111602	111603	111604	
25mm Pipe	112601	112602	112603	112604	
32mm Pipe	113601	113602	113603	113604	
50mm Pipe	115601	115602	115603	115604	
63mm Pipe	116601	116602	116603	116604	

MDPE SYSTEMS



"Supreme" MDPE Fittings (16 Bar) Material: Polyethelene Standard: BS EN 12201-2

Product	Size	Code	Product	Size	Code
Stopcock-Plastic			90° Elbow		
	20mm	491042		20mm	491015
	25mm	492042		25mm	492015
	32mm	493042		32mm	493015
Pipe Liner				50mm	495015
	20mm	491000		63mm	496015
	25mm	492000	90° Tee		
	32mm	493000		20mm	491024
Adaptors Kit for copper pipe BS EN 1057 (Pull out resistant)				25mm	492024
5.0	20 x 15mm Copper	491003		32mm	493024
00	25 x 22mm Copper	492003		50mm	495024
Universal Adaptors - Fits plastic, lead, copper and zinc plated pipes				63mm	496024
	20 x 15-21mm	491007	Male Adaptor	·	
	25 x 15-21mm	492007		20mm x ½"	491102
	25 x 21-27mm	492008		20mm x ¾"	491202
	25 x 27-34mm	492009		25mm x ½"	492102
Terminal Cap				25mm x ¾"	492202
	20mm	491006		25mm x 1"	492302
	25mm	492006		32mm x ¾"	493202
	32mm	493006		32mm x 1"	493302
Coupling			Female Adaptor		
	20mm	491012		20mm x ½"	491103
	25mm	492012		20mm x ¾"	491203
	32mm	493012		25mm x ½"	492103
	50mm	495012		25mm x ¾"	492203
	63mm	496012		25mm x 1"	492303
Reducing Coupling				32mm x ¾"	493203
	25 x 20mm	492113		32mm x 1"	493303
	32 x 25mm	493213	Reducing 90° Tee	·	
	50 x 32mm	495313	FA	25 x 20 x 25mm	492125
Wall Plate Elbow				32 x 25 x 32mm	493225
	20mm x ½"	491105		50 x 32 x 50mm	495325
	25mm x ¾"	492205			

FloPlast building the future



Contact Details:

FloPlast LimitedCastle Road, **Eurolink Business Park** Sittingbourne, Kent ME10 3FP, UK

Tel

01795 431731

Sales Office Direct Line 01795 421422

Fax

01795 431188

E-mail

sales@floplast.co.uk

Website

www.floplast.co.uk



April 2020

Brochures available:



























































