



FloPlast
building the future


EXTERNAL AIR ADMITTANCE VALVES

SOIL & WASTE SYSTEM



FloPlast's External Air Admittance Valve will allow the installation of an external soil pipe within 3 metres of any opening. It terminates at the same height as if it were installed internally, i.e. 200mm (minimum) above the highest wet entry point to the soil vent pipe. See diagram opposite.

- Fitted with an environmental mesh to reduce the risk of insects and environmental debris ingress.
- Product is A1 tested and approved in accordance with BS EN 12380, which allows it to be installed below the flood level of connected appliances.
- Tested and approved for use between -20c and +60c without the use of insulation.
- Can be used as an additional secondary rodding point.
- Compatible with all UK 110mm plastic soil systems manufactured to BS EN 1329-1 or BS EN 1453-1.
- Push-fit installation to 110mm pipe or solvent weld to 82mm pipe.
- Must be installed vertically.
- CE and Kitemarked to BS EN 12380 (KM512474).
- Available in black, white, grey and anthracite grey.

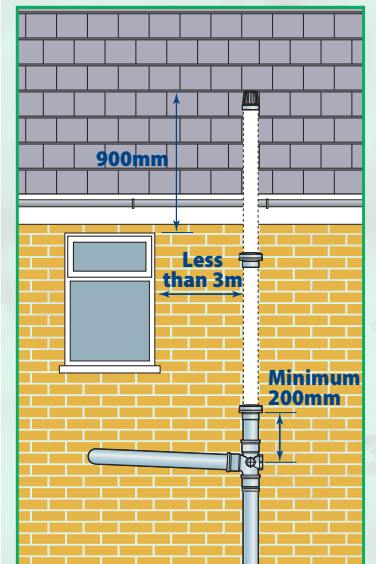

01795 431 731

www.floplast.co.uk

sales@floplast.co.uk