


**Half Round "Cast Iron" Style
Rainwater Systems**



CLASSIC STYLING WITH A MAINTENANCE FREE FINISH

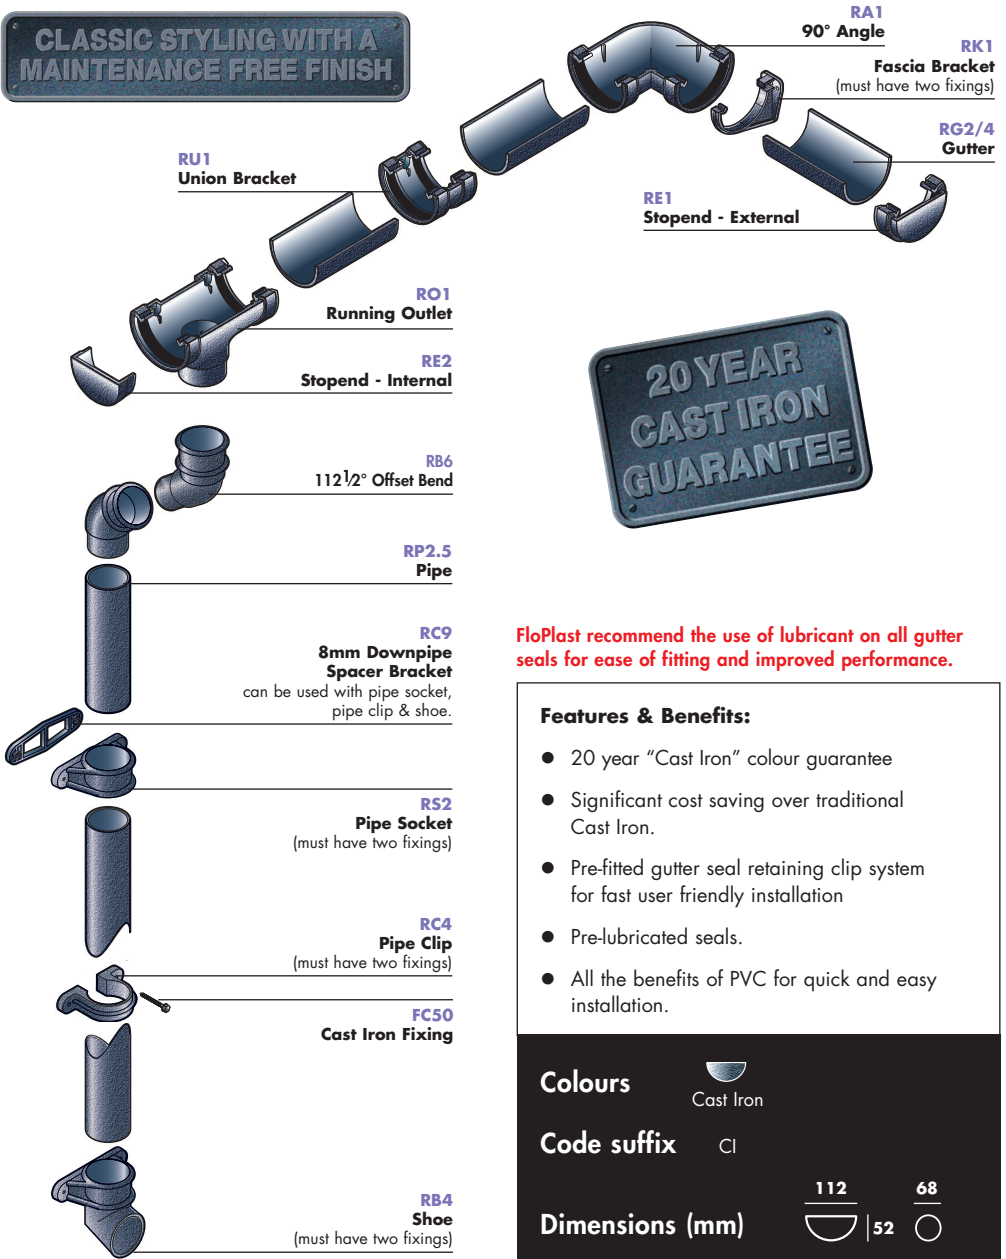

FloPlast recommend the use of lubricant on all gutter seals for ease of fitting and improved performance.

Features & Benefits:

- 20 year "Cast Iron" colour guarantee
- Significant cost saving over traditional Cast Iron.
- Pre-fitted gutter seal retaining clip system for fast user friendly installation
- Pre-lubricated seals.
- All the benefits of PVC for quick and easy installation.


Colours



Code suffix

CI

Dimensions (mm)



112MM GUTTER & FITTINGS BS EN 607:2004, BS 12200-1:2000, BS EN 1462:2004



Gutter and pipe code reference numbers refer to length of run: 2 metres, 2.5 metres and 4 metres.

For Ancillaries and Spares see page 5.

Product	Code	
Gutter	4m	RG4
	2m	RG2
Angle		
	90°	RA1
	135°	RA2
	any degree	RA9#

*FloPlast will fabricate any non-standard angle to special order

Product	Code	
Running Outlet - 68mm round		RO1
Stopend Outlet - 68mm round		RO2
Stopend		
	External	RE1
	Internal	RE2

Product	Code	
Fascia Bracket		RK1
Union Bracket		RU1
To Cast Iron Ogee gutter adaptors		
	R/H	RD3
	L/H	RD4
To Half Round Cast Iron gutter adaptors		
		RD5

68MM ROUND DOWNPIPE & FITTINGS BS EN 607:2004, BS 12200-1:2000, BS EN 1462:2004

Product	Code	
Pipe	2.5m	RP2.5
Offset Bend		
	92½°	RB8
	112½°	RB6
Shoe		RB4#
Pipe Clip		RC4#
Pipe Socket		RS2#
67½° Branch		RY1

Product	Code	
Access Pipe		RX1
Square/Round Downpipe Adaptor		RDS2
Universal Hopper	Connects to 65mm square & 68mm round downpipe	RH1
Ogee Hopper	Connects to 68mm round and 65mm square downpipes.	RH4#
Rectangular Hopper**	Connects to 68mm round and 65mm square downpipes.	RH5#
Cast Iron Fixings*		FC50
12 gauge x 50mm stainless steel fixings for "cast Iron" Range		

Product	Code	
Fleur-de-Lis	40mm	FL55
	52mm	FL70
Tudor Rose	40mm	TR55
	52mm	TR70
Decorative Square	40mm	DS55
	52mm	DS70
Lion's Head	40mm	LH55
	52mm	LH70

Moils can be applied to hoppers or running outlets using a proprietary adhesive such as Siroflex MS Polymer.

**This product is rotationally moulded and subject to bowing along its length up to +/-4%.

*With fixing lugs (Requires 2 x FC50 fixings)

***Fixing instructions for the FC50 (Cast Iron fixing bolts)**
The FC50 is a 12 gauge x 50mm Stainless Steel Bolt, that requires a 12mm, 12 point star head socket to tighten it. When using these fixings on Ogee and Rectangular Hoppers we recommend that a 3/4" tap washer is used. When fixing product to concrete, brick, block etc fix FC50 in the same way as any other screw by using a plug type fixing, and into timber by pilot drilling a starter hole first.

FloPlast

building the future

FloPlast Limited
 Castle Road
 Eurolink Business Park
 Sittingbourne
 Kent ME10 3FP
 UK

Tel: 01795 431731
 Sales Office Direct Line:
 01795 421422

Fax:
 01795 431188

E-mail:
 sales@floplast.co.uk

Website:
 www.floplast.co.uk



Other systems available:

