


**Hi-Cap Cast Iron Style
Rainwater System**



CLASSIC STYLING WITH A MAINTENANCE FREE FINISH

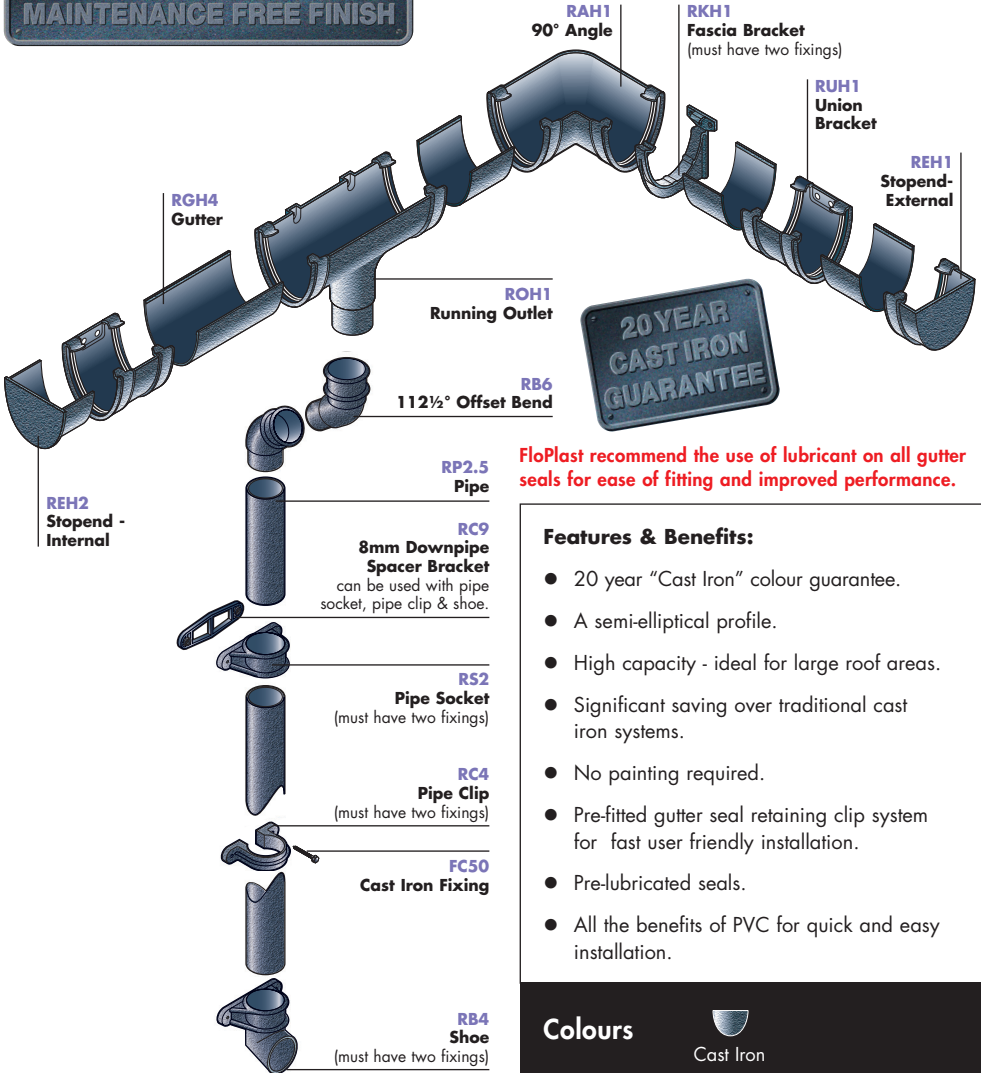

FloPlast recommend the use of lubricant on all gutter seals for ease of fitting and improved performance.

Features & Benefits:

- 20 year "Cast Iron" colour guarantee.
- A semi-elliptical profile.
- High capacity - ideal for large roof areas.
- Significant saving over traditional cast iron systems.
- No painting required.
- Pre-fitted gutter seal retaining clip system for fast user friendly installation.
- Pre-lubricated seals.
- All the benefits of PVC for quick and easy installation.

Colours



Cast Iron

Code suffix

CI

Dimensions (mm)





115MM GUTTER & FITTINGS BS EN 607:2004, BS 12200-1:2000, BS EN 1462:2004





Gutter and pipe code reference numbers refer to length of run: 2.5 metres and 4 metres.








For Ancillaries and Spares see page 5.







Product	Code
Gutter	
	4m RGH4
Union Bracket	
	RUH1
Running Outlet - 68mm round	
	ROH1





Product	Code
Angle	
	90° RAH1
	135° RAH2
	any degree RAH9*
*FloPlast will fabricate any non-standard angle to special order	

Product	Code
Stopend	
	External REH1
	Internal REH2
Fascia Bracket	
	RKH1

68MM ROUND DOWNPIPE & FITTINGS BS EN 607:2004, BS 12200-1:2000, BS EN 1462:2004

Product	Code
Pipe	
	2.5m RP2.5
Offset Bend	
	92½° RB8
	112½° RB6
Shoe	
	RB4*
Pipe Clip	
	RC4*
Pipe Socket	
	RS2*
67½° Branch	
	RY1

Product	Code
Access Pipe	
	RX1
Square/Round Downpipe Adaptor	
	RDS2
Universal Hopper	
	Connects to 65mm square & 68mm round downpipe RH1
Ogee Hopper	
	Connects to 68mm round and 65mm square downpipes. RH4*
Rectangular Hopper**	
	Connects to 68mm round and 65mm square downpipes. RH5*
Cast Iron Fixings*	
	FC50
12 gauge x 50mm stainless steel fixings for "cast Iron" Range	

Product	Code
Fleur-de-Lis	
	55mm FL55
	75mm FL70
Tudor Rose	
	40mm TR55
	55mm TR70
Decorative Square	
	40mm DS55
	70mm DS70
Lion's Head	
	75mm LH55
	90mm LH70

Motifs can be applied to hoppers or running outlets using a proprietary adhesive such as Siroflex MS Polymer.

** This product is rotationally moulded and subject to bowing along its length up to +/-4%.

*With fixing lugs (Requires 2 x FC50 fixings)

***Fixing instructions for the FC50 (Cast Iron fixing bolts)**
The FC50 is a 12 gauge x 50mm Stainless Steel Bolt, that requires a 12mm, 12 point star head socket to tighten it. When using these fixings on Ogee and Rectangular Hoppers we recommend that a 3/4" top washer is used. When fixing product to concrete, brick, block etc fix FC50 in the same way as any other screw by using a plug type fixing, and into timber by pilot drilling a starter hole first.

FloPlast

building the future

FloPlast Limited
 Castle Road
 Eurolink Business Park
 Sittingbourne
 Kent ME10 3FP
 UK

Tel: 01795 431731
 Sales Office Direct Line:
 01795 421422






Fax:
 01795 431188

E-mail:
 sales@floplast.co.uk

Website:
 www.floplast.co.uk



Other systems available:



PVC-UE Roofline,
 Window &
 Cladding Systems

Rainwater
 Systems

Soil & Waste
 Systems

Underground
 Drainage Systems

MDPE
 Systems

Hot & Cold
 Plumbing Systems