


Niagara Cast Iron Style Rainwater Systems





Niagara® OGEE "CAST IRON" STYLE 110MM/65MM/68MM RAINWATER SYSTEM

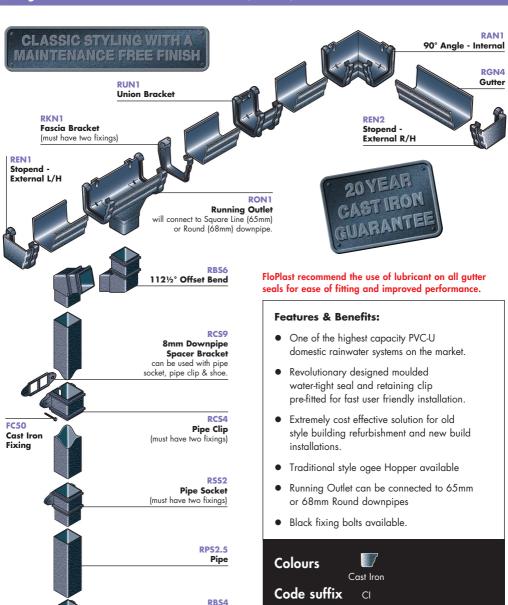

Shoe

Dimensions (mm)

(must have two fixings)

フ |80

110MM GUTTER & FITTINGS BS EN 607:2004, BS 12200-1:2000, BS EN 1462:2004







Gutter and pipe code reference numbers refer to length of run: 2.5 metres, 3 metres and 4 metres.

de	Co		Product
			Gutter
N4	n RG	4m	
N3	n RG	3m	
			90° Angle
N1	al RAI	Internal	
N2	al RAI	External	
			135° Angle
N3	al RAI	Internal	
1	al RAI	External	135° Angle

External RAN4

Product	1	Code		
Angle - Any Degree				
		RAN9#		
Running Outlet - Multi Outlet				
		RON1		
Stopend Outlet - 65mm				
L/I	Н	RON2		
R/1	Н	RON3		
Union Bracket				
		RUN1		

For Ancillaries and Spares see page 5. Product Stopend - External REN1 L/H REN2 Stopend - Internal REN3 REN4 Fascia Bracket

RKN1

65MM SQUARE DOWNPIPE & FITTINGS BS EN 607:2004, BS 12200-1:2000, BS EN 1462:2004

Product Pipe 2.5m	Code
	RPS2.5
Offset Bend	
92½°	RBS8
1121/2°	RBS6
Shoe	
	RBS4#
Pipe Clip	
	RCS4#
Pipe Socket	
	RSS2#

Please note: Round downpipe can also be used, please see page 15

Product		Code		
67½° Branch				
		RYS2		
Square/Round Downpipe Adaptor				
1		RDS2		
Universal Hopper				
	Connects to 65mm square & 68mm round downpipe	RH1		
Ogee Hopper				
F.	Connects to 68mm round and 65mm square downpipes.	RH4#		
Rectangular Hopper**				
	Connects to 68mm round and 65mm square downpipes.	RH5#		

Product		Code
Fleur-de-Lis		
	40mm	FL55
عالات	52mm	FL70
Tudor Rose		
	40mm	TR55
	52mm	TR70
Decorative Square		
202	40mm	DS55
	52mm	DS70
Lion's Head		
	40mm	LH55
	52mm	LH70

Motifs can be applied to hoppers or running outlets using a proprietary adhesive such as Siroflex MS Polymer.

** This product is rotationally moulded and subject to bowing along its length up to $\pm -4\%$.

*Fixing instructions for the FC50 (Cast Iron fixing bolts)

The FC50 is a 12 gauge x 50mm Stainless Steel Bolt, that requires a12mm, 12 point star head socket to tighten it. When using these fixings on Ogee and Rectangular Hoppers we recommend that a 3/4" tap washer is used. When fixing product to concrete, brick, block etc fix FC50 in the same way as any other screw by using a plug type fixing, and into timber by pilot drilling a starter hole first.

FloPlast building the future

FloPlast Limited
Castle Road
Eurolink Business Park
Sittingbourne
Kent ME10 3FP
UK

Tel: 01795 431731

Sales Office Direct Line: 01795 421422

Fax:

01795 431188

E-mail:

sales@floplast.co.uk

Website:

www.floplast.co.uk



Other systems available:













































